

27th

1997-2024

东莞市三星摄影器材有限公司

DONGGUAN SANXING PHOTOGRAPHIC EQUIPMENT CO., LTD

地址: 广东省东莞市东城区桑园狮龙路46号

电话: 0769-22269155 Email: DGPD@126.com

手机: 135-0921-5098 / 135-3713-7898

QQ: 383831978 QQ邮箱: 383831978@qq.com

www.sxpd.com

专业影棚器材 1997 - 2024

拍得樂
Paidele
1997-2024

PDL® 拍得樂
Paidele
1997-2024

LIGHTING SUPPORT SOLUTIONS

东莞市三星摄影器材有限公司
DONGGUAN SANXING PHOTOGRAPHIC EQUIPMENT CO., LTD



企业资质 Enterprise qualification

公司简介 Company profile

东莞市三星摄影器材有限公司，位于广东省粤港澳大湾区国际经贸交易中心、制造业名城——东莞，是一家集设计，研发，生产，销售于一体的影视摄影器材公司。

公司自一九九七年成立以来，一直秉承“精益求精，自主创新”的经营理念，产品创新，质量达国际标准，拥有先进的生产设备，完善的产品管理体系及优质的售后服务。根据当代青年热追电影电视剧的浪潮，以及短视频引流，直播代货火热趋势，预测在未来二三十年内自媒体娱乐领域对影视周边辅助产品（摄影器材）的需求量不断增大，国内自产自销解决80%的供求，由于我们产品获得国际认证，畅销于美国，德国，英国，加拿大，日本，韩国，东南亚等三十多个国家和地区，深得摄影界人士的喜爱和广泛应用。同时也成为影视、平面摄影器材的首选品牌。

Dongguan Sanxing photographic equipment Co., Ltd., located in Dongguan, Guangdong Province, Guangdong Province, Guangdong, Hong Kong and Macao Dawan District International Economic and Trade Center, manufacturing city, is a set of design, research and development, production, sales in one of the film and television photography equipment company.


Since its establishment in 1997, the company has been adhering to the business philosophy of "excellence, independent innovation", product innovation, quality up to international standards, with advanced production equipment, perfect product management system and high-quality after-sales service. According to the trend of young people's hot pursuit of movies and TV series, as well as the hot trend of short video drainage and live delivery, it is predicted that in the next 20 to 30 years, the demand for auxiliary products (photographic equipment) surrounding films and TV plays will continue to increase in the field of we media entertainment. Domestic self-produced and self-sale products will solve 80% of the supply and demand. Because our products have obtained international certification, they are sold well in the United States, Germany, Britain and Canada, Japan, South Korea, Southeast Asia and more than 30 countries and regions, deeply loved and widely used by photographers. At the same time, it has also become the preferred brand of film and television, plane photography equipment.



ROHS



CE认证

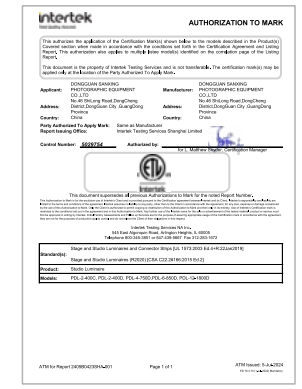

ETL认证



实用专利



实用专利



外观专利



产品目录 | Product catalog

摄影灯架 PHOTOGRAPHIC LIGHT STANDS	01-08
连锁灯架 INTERLOCKING LIGHT STAND	09-10
斜臂两用灯架 OBLIQUE ARM DUAL-PURPOSE LIGHT STAND	11-12
吊臂灯架 LIGHTING BOOM STAND	13-14
轻便手摇灯架 LIGHTWEIGHT HAND-CRANKED LIGHT STAND	15-16
底座折叠灯架 ROLLER STANDS	17-18
魔术腿 C-STAND	19-21
重型座机架 HEAVY BASE FRAME	22
影视灯架 FILM AND TELEVISION LIGHT STANDS	23-28
重型两用吊臂灯架 BOOM STANDS	29-30
手摇灯架 WIND UP STAND	31-33
手摇重型吊臂 MEGA BOOMS	34
重型手摇灯架 STRATO SAFE STAND	35-36
摄影机脚架 CAMERA TRIPOD	37-38
导演车工作台 DIRECTOR'S CAR WORKBENCH	39-42
铝合金旗板 ALUMINUM ALLOY FLAG BOARD	43
蝴蝶布框 BUTTERFLY CLOTH FRAME	44
背景架套装 BACKDROP SET	45-46
拍摄台 SHOOTING STAGE	47-48
多功能夹具 MULTI-FUNCTIONAL FIXTURE	49-50
摄影配件 PHOTOGRAPHIC ACCESSORIES	51-54
魔术腿配件 MAGIC LEG ACCESSORIES	55
独脚架/云台 MONOPOD / GIMBAL	57-60

产品参数符号 KEY TO SYMBOLS

最小高度 Minimum Height	最大高度 Maximum Height	闭合高度 Closed Length	支架底直径 Footprint Diameter	自身重量 Weight	最高承重 Maximum Evenly Distributed Load on Level Ground



产品目录 | Product catalog

太空灯彩色系列 | SPACE LIGHT COLOR SERIES

单头彩色太空灯 SINGLE-HEAD COLORED SPACE LIGHTS	PDL-1-200RGB	61
两头彩色太空灯 TWO-ENDED COLORED SPACE LIGHTS	PDL-2-400RGB	63
三头彩色太空灯 THREE-HEADED COLORED SPACE LIGHTS	PDL-3-500RGB	65
四头彩色太空灯 FOUR-HEADED COLORED SPACE LIGHTS	PDL-4-600RGB	67
六头彩色太空灯 SIX COLORED SPACE LIGHTS	PDL-6-900RGB	69
九头彩色太空灯 NINE-HEADED COLORED SPACE LIGHTS	PDL-9-1400RGB	71
十二头彩色太空灯 TWELVE COLORED SPACE LIGHTS	PDL-12-1800RGB	73

太空灯双色系列 | SPACE LIGHT TWO-COLOR SERIES

单头双色太空灯 SINGLE-HEADED, TWO-COLOR SPACE LIGHT	PDL-1-150W	75
两头双色太空灯 TWO-TONE SPACE LIGHTS AT BOTH ENDS	PDL-2-400D	77
三头双色太空灯 THREE-HEADED TWO-TONE SPACE LIGHT	PDL-3-600D	79
四头双色太空灯 FOUR-HEADED TWO-TONE SPACE LIGHTS	PDL-4-750W	81
六头双色太空灯 SIX-HEADED TWO-COLOR SPACE LIGHTS	PDL-6-900W	83
六头双色圆形太空灯 SIX-HEADED TWO-HEADED CIRCULAR SPACE LIGHTS	PDL-6-900W	85
八头双色太空灯 EIGHT TWO-HEADED TWO-COLOR SPACE LIGHTS	PDL-8-1300W	87
九头双色太空灯 NINE-HEADED TWO-COLOR SPACE LIGHTS	PDL-9-1400W	89
十二头双色太空灯 TWELVE-HEADED TWO-TONE SPACE LIGHTS	PDL-12-1800W	91

控制设备系列 | CONTROL DEVICE SERIES

DMX512灯光控台 DMX512 LIGHTING CONSOLE	PDL-CT-512	93
无线发射器 WIRELESS TRANSMITTER	PDL-MK-512	93

太空灯配件 | SPACE LIGHT ACCESSORIES

聚光灯系列 | SPOTLIGHT SERIES

聚光灯 SPOTLIGHT	PDL-S-200D	95
聚光灯 SPOTLIGHT	PDL-S-500D	97
聚光灯 SPOTLIGHT	PDL-S-1500D	99
聚光灯 SPOTLIGHT	PDL-S-2000D	99

平板灯系列 | PANEL LIGHT SERIES

PDL-EPL-350RGB	101
----------------	-----

充气灯系列 | INFLATABLE LAMP SERIES

充气灯 INFLATABLE LAMPS	PDL-GD-900D	103
------------------------	-------------	-----


灯管系列 | LAMP SERIES

	105
--	-----



MF6020

Aluminium stand. 2 sections, 1 riser.
 Ø: 22.4mm, 19mm. Leg 20x5mm




55cm 87cm 9cm 60cm 1.2kg 3kg



10-F000

Aluminium stand. 2 sections, 1 riser.
 Ø: 30mm, 25mm. Leg 20x5mm



42cm 63cm 9cm 60cm 1.3kg 5kg



MF6025

Aluminium stand. 4 sections, 3 risers.
 Ø: 25.7mm, 22.4mm, 19mm, 16mm. Leg Ø: 19mm



46cm 125cm 53cm 46cm 0.8kg 2kg



MF6030

Aluminium stand. 4 sections, 3 risers.
 Ø: 25.7mm, 22.4mm, 19mm, 16mm. Leg Ø: 19mm



80cm 240cm 68cm 92cm 1.3kg 3kg



10-021(4)

Aluminium stand. 4 sections, 3 risers.
 Ø: 29.1mm, 25.7mm, 22.4mm, 19mm. Leg 16x5mm



73cm 173cm 53cm 60cm 1.2kg 2.5kg



10-021(5)

Aluminium stand. 5 sections, 4 risers.
 Ø: 29.1mm, 25.7mm, 22.4mm, 19mm, 16mm. Leg 16x5mm



65cm 213cm 51cm 60cm 1.3kg 2kg



MF6865

Aluminium stand. 5 sections, 4 risers.
 Ø: 29.1mm, 25.7mm, 22.4mm, 19mm, 16mm. Leg 16x5mm



160cm 230cm 64cm 60cm 1.3kg 3kg



MF6865演示效果，上下设有一个卡头，可夹反光板
 The MF 6865 demonstrates the effect with a clamp on the top and bottom for the reflector.



A104

- 18cm
- 21cm
- 40cm
- 9kg
- 50kg



MF6606

- Aluminium stand. 5 sections, 4 risers.
Ø: 25.7mm, 22.4mm, 19mm, 16mm, 13mm, Leg Ø: 19mm, 16mm
- 72cm
 - 188cm
 - 49cm
 - 86/146cm
 - 1.2kg
 - 2.5kg

MF6607

- Aluminium stand. 5 sections, 4 risers.
Ø: 29.1mm, 25.7mm, 22.4mm, 19mm, 16mm. Leg Ø: 19mm, 16mm
- 72cm
 - 188cm
 - 49cm
 - 86/146cm
 - 1.25kg
 - 3.5kg



MF6040

- Aluminium stand. 4 sections, 3 risers.
Ø: 29.1mm, 25.7mm, 22.4mm, 19mm. Leg Ø: 22mm
- 90cm
 - 300cm
 - 86cm
 - 108cm
 - 1.7kg
 - 3kg



MF6070

- Black steel stand. 2 sections, 1 riser.
Ø: 36mm, 30mm. Leg Ø: 25mm
- 118cm
 - 230cm
 - 124cm
 - 120cm
 - 6.5kg
 - 20kg



SM301

- Aluminium stand. 3 sections, 2 risers.
Ø: 35mm, 30mm, 20mm, . Leg Ø: 22mm
- 116cm
 - 268cm
 - 98cm
 - 112cm
 - 2.5kg
 - 3kg



10-F1001

- Aluminium stand. 3 sections, 2 risers.
Ø: 35mm, 30mm, 25mm, . Leg Ø: 20mm
- 90cm
 - 191cm
 - 81cm
 - 60cm
 - 1.6kg
 - 5kg



10-F1002

Aluminium stand. 3 sections, 2 risers.
 Ø: 35mm,30mm,25mm. Leg Ø: 22mm

130cm 286cm 111cm 110cm 2.2kg 6kg



10-F1003

Aluminium stand. 4 sections, 3 risers.
 Ø: 35mm,30mm,25mm,20mm. Leg Ø: 22mm

145cm 380cm 111cm 110cm 2.4kg 5kg



金属旋钮

10-1003M

Aluminium stand. 4 sections, 3 risers.
 Ø: 35mm, 30mm, 25mm,20mm. Leg Ø: 20mm

127cm 380cm 111cm 110cm 2.4kg 5kg



MF801

Aluminium stand. 4 sections, 3 risers.
 Ø: 42mm,35mm, 30mm,25mm. Leg Ø: 25mm

145cm 380cm 130cm 128cm 3.3kg 8kg



MF804

Aluminium stand. 6 sections, 5 risers.
 Ø: 50mm, 45mm,40mm, 35mm, 30mm, 25mm. Leg Ø: 30mm

220cm 740cm 190cm 166cm 10kg 10kg



MF802

Aluminium stand. 5 sections, 4 risers.
 Ø: 42mm, 35mm, 30mm, 25mm,20mm. Leg Ø:25mm

163cm 520cm 140cm 128cm 4.2kg 5kg

MF803

Aluminium stand. 5 sections, 4 risers.
 Ø: 42mm, 35mm, 30mm, 25mm,20mm. Leg Ø:25mm

170cm 600cm 152cm 128cm 4.9kg 5kg


快收灯架 | QUICK-CLOSING LIGHT STAND

特点:

- 提起灯架时，脚自动收合，放下时脚自动打开，在室内外拍摄使用时，灯架位置移动很方便。

Features:

- When the light stand is lifted, the legs will automatically fold, and when it is lowered, the legs will automatically open. It is very convenient to move the light stand when used for indoor and outdoor shooting.

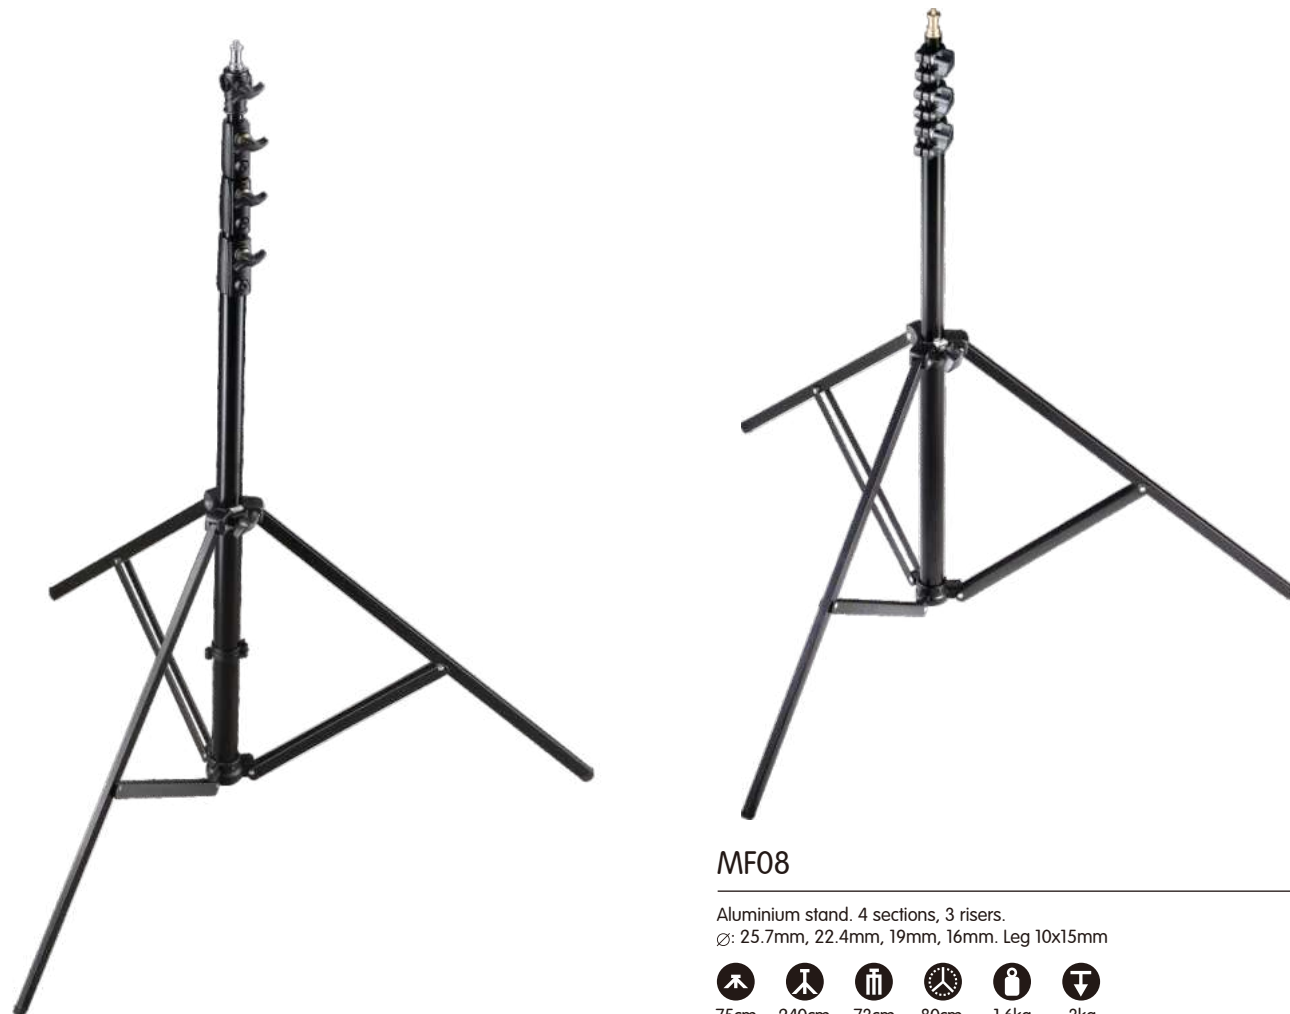

MF12

Aluminium stand. 4 sections, 3 risers.
 ∅: 35mm, 30mm, 25mm, 20mm. Leg 10.4x21mm



MF08

Aluminium stand. 4 sections, 3 risers.
 ∅: 25.7mm, 22.4mm, 19mm, 16mm. Leg 10x15mm



MF10

Aluminium stand. 4 sections, 3 risers.
 ∅: 29.1mm, 25.7mm, 22.4mm, 19mm. Leg 12x17mm



天地撑杆 | AUTOPOLE SYSTEM

特点:

- 独特的悬臂单动锁定系统施加压力，将橡胶吸盘末端牢固地楔入到位。
- 地板到天花板或墙壁到墙壁的固定，为照明提供强大的垂直或水平支撑。
- 悬臂系统包含安全锁。

Features:

- Unique cantilever single action locking system exerts pressure to securely wedge the rubber suction cup ends in place.
- Cantilever system incorporates safety lock.
- Floor to ceiling, or wall to wall fixing for strong vertical or horizontal support of lighting.



20-2000IIB3.8M (black)
 20-2000IIS3.8M (silver)

Extends from 214cm to 380cm.
 Pole ∅45mm and 40mm

20-2000IIB4.1M (black)
 20-2000IIS4.1M (silver)

Extends from 214cm to 410cm.
 Pole ∅45mm and 40mm



MF6837
 天地杆水平仪
 Heaven and earth rod level

连锁灯架 | INTERLOCKING LIGHT STAND


专利产品/Patented products

特点:

- 堆叠系统的关键在于便携性！将它们堆叠在一起，节省工作室空间，或将它们放在紧凑的盒子中，方便携带进行户外拍摄。这款新品即使在合上时也能自行站立。

Features:

- With the piling system portability is at the essence! Cling them together and save a lot of room in the studio or carry them in a compact case to easily bring them with you for outdoor shooting. The new baby is now able to stand up on its own even when it's closed.

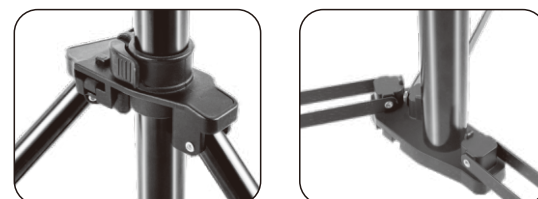

肩带(选配)
Shoulder straps(Matching)



MF701 / MF701P(AIR)

Aluminium stand. 4 sections, 3 risers.
Ø: 35mm, 30mm, 25mm, 20mm. Leg Ø: 22mm



MF701A / MF701AP(AIR)

Aluminium stand. 3 sections, 2 risers.
Ø: 35mm, 30mm, 25mm. Leg Ø: 22mm



MF702 / MF702P(AIR)

Aluminium stand. 4 sections, 3 risers.
Ø: 29.1mm, 25.7mm, 22.4mm, 19mm. Leg Ø: 19mm



MF702A / MF702AP(AIR)

Aluminium stand. 4 sections, 3 risers.
Ø: 29.1mm, 25.7mm, 22.4mm, 19mm. Leg Ø: 19mm





MF703

Aluminium stand. 4 sections, 3 risers.
 Ø: 29.1mm, 25.7mm, 22.4mm, 19mm. Leg Ø: 22mm



106cm 290cm 93cm 112cm 2kg 2kg



MF704

Aluminium stand. 4 sections, 3 risers.
 Ø: 35mm, 30mm, 25mm, 20mm. Leg Ø: 22mm



136cm 377cm 117cm 112cm 2.5kg 4kg



MF6080B

Aluminium stand. Supplied with sandbag counterweight (empty)
 4 sections, 3 risers. Ø: 36mm, 30mm, 25mm, 20mm. Leg Ø: 25mm



129cm 442cm 125cm 109cm 4.3kg 5kg



MF6080S

Chrome plated steel stand. Supplied with sandbag counterweight (empty)
 4 sections, 3 risers. Ø: 36mm, 30mm, 25mm, 20mm. Leg Ø: 25mm



129cm 442cm 125cm 109cm 7kg 6kg



10-1126 / 11-018

吊臂总长217cm；收缩128cm；配有转盘、5kg重平衡铁；重型钢脚架，电绕夹配上脚轮，移动方便；自重12kg。



10-C1126 / 11-018

吊臂可伸缩，可伸长250cm；收缩153cm；可遥控采光移动（即可左右、仰俯转头）；配有转盘5kg重平衡铁；重型钢脚架，并配电绕夹，配上脚轮，移动方便；自重14.5kg。



MF6240

吊臂总长130cm；收缩99cm；配有转盘、6kg重沙袋；安装在重型钢脚架，配上脚轮，移动方便；自重9kg。



MF6245

吊臂总长270cm；收缩162cm；配有转盘、6kg重沙袋；安装在重型钢脚架，配上脚轮，移动方便；自重12kg。



10-C1117

吊臂可伸缩，可伸长225cm；收缩131cm；安在墙上后，可180度水平移动及仰俯转头自重5.5kg，承重5kg。



10-1117

吊臂可伸缩，可伸长210cm；收缩114cm；安在墙上后，可180度水平移动；自重4.5kg，承重5kg。




MF04

Chrome plated steel BOOM. 3 sections, 2 risers.
Ø : 48mm, 42mm, 36mm.

129cm 442cm 4.3kg 7kg




MF04A

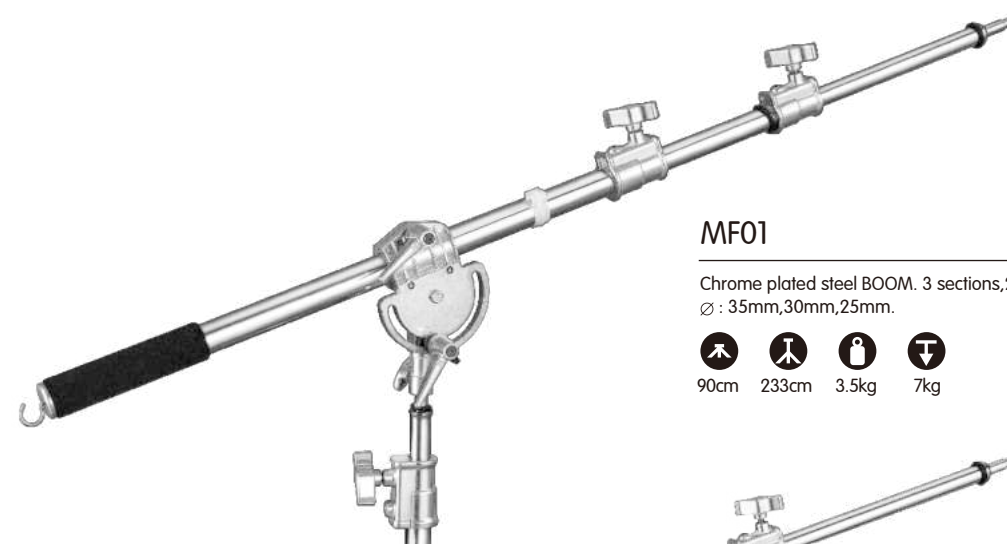

MF01

Chrome plated steel BOOM. 3 sections, 2 risers.
Ø : 35mm, 30mm, 25mm.

90cm 233cm 3.5kg 7kg




MF02: 60x74mm
MF02A: 92x120mm

MF02 / MF02A

Chrome plated steel BOOM. 3 sections, 2 risers.
Ø : 35mm, 30mm, 25mm.

113cm 200cm 2.9kg 7kg

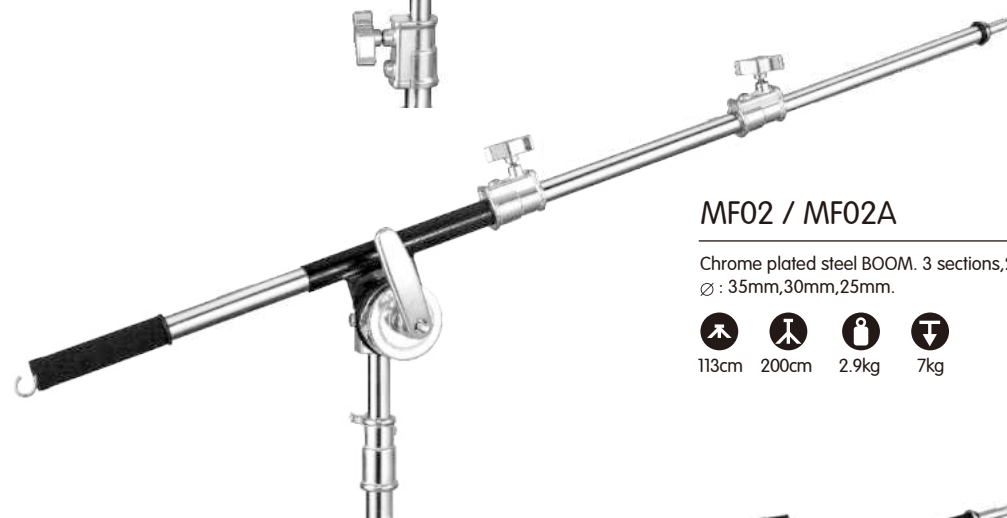

MF03

Aluminium BOOM. 3 sections, 2 risers.
Ø : 35mm, 30mm, 25mm.

113cm 200cm 2.9kg 5kg

轻便手摇灯架 | LIGHTWEIGHT HAND-CRANKED LIGHT STAND



MF689

Black steel stand. 2 sections, 1 risers.
Ø: 45mm, 35mm. Leg 20x40mm



MF689AS

Chrome plated steel stand. 2 sections, 1 risers.
Ø: 45mm, 35mm. Leg Ø: 25mm



MF689BS

Chrome plated steel stand. 2 sections, 1 risers.
Ø: 45mm, 35mm. Leg 25x25mm



斜臂手摇灯架套装 | OBLIQUE ARM HAND CRANK LIGHT STAND SET



MF6083

booms Min extension 153cm—Max load 20kg
booms Max extension 280cm—Max load 10kg
Ø: 42mm, 36mm. 2 section boom



MF6085

booms Min extension 153cm—Max load 15kg
booms Max extension 250cm—Max load 5kg
Ø: 35mm, 30mm. 2 section boom

Chrome plated steel stand. 2 sections, 1 risers.
Ø: 45mm, 35mm. Leg Ø: 25mm



MF6086

booms Min extension 153cm—Max load 20kg
booms Max extension 280cm—Max load 10kg
Ø: 42mm, 36mm. 2 section boom

Chrome plated steel stand. 2 sections, 1 risers.
Ø: 45mm, 35mm. Leg 25x25mm





MF6880

Chrome plated steel post Ø: 35mm. Complete with braked wheels.
Height of light fixture: from ground level to 250cm. 1 levelling leg.



MF6887



MF6884



效果图/RENDERINGS




MF6880A

1 levelling leg.
Complete with braked wheels.



MF6880B

Chrome plated steel stand. 3 sections, 2 risers.
Ø: 48mm, 42mm, 36mm. Leg 20x40mm



MF7060

Chrome plated steel stand. 3 sections, 2 risers.
Ø: 35mm, 30mm, 25mm. Leg 20x20mm



MF7061

Chrome plated steel stand. 3 sections, 2 risers.
Ø: 35mm, 30mm, 25mm. Leg 20x20mm



魔术腿 | C-STAND

采用高强度和韧性好的钢管，高质量镀铬表面处理可抵抗各种天气条件，广泛应用于平面摄影和影视拍摄。
Made of high-strength and tough steel pipe, high-quality chrome-plated surface treatment can withstand various weather conditions, widely used in flat photography and film and television shooting.

分离式魔术腿 | DETACHABLE C-STAND

- 中心管分别采用高强度钢管镀铬制成
- 底座与中心管可分离，方便储存与运输
- The center tube is made of high-strength chrome-plated steel tube
- the base and the center tube can be separated for easy storage and rtation

注：可分离魔术腿套装包含
(1支直径16mm持力臂，2个2.5"魔术头，1支魔术腿)
Note: Detachable C-STAND set includes
(one pcs 16mm EXTENSION GRIP ARM,two pcs 2.5"Grip Head,one pcs C-STAND)

20" C-STAND

CB20" 魔术腿(黑色) CB20"-4 魔术腿套装(黑色)
CS20" 魔术腿(银色) CS20"-4 魔术腿套装(银色)
CT20" 魔术腿(不锈钢) CT20"-4 魔术腿套装(不锈钢)

     
89cm 132cm 89cm 950cm 5.4kg 10kg

30" C-STAND

CB30" 魔术腿(黑色) CB30"-4 魔术腿套装(黑色)
CS30" 魔术腿(银色) CS30"-4 魔术腿套装(银色)
CT30" 魔术腿(不锈钢) CT30"-4 魔术腿套装(不锈钢)

     
120cm 226cm 100cm 950cm 6kg 10kg

40" C-STAND

CB40" 魔术腿(黑色) CB40"-4 魔术腿套装(黑色)
CS40" 魔术腿(银色) CS40"-4 魔术腿套装(银色)
CT40" 魔术腿(不锈钢) CT40"-4 魔术腿套装(不锈钢)

     
155cm 330cm 135cm 950cm 6.3kg 10kg

中心管 ∅ 35mm,30mm,25mm。脚管 ∅25mm; 壁厚: 1.5mm。
Pole ∅ :35mm,30mm,25mm。Leg ∅ :25m;thickness:1.5mm

可调式魔术腿 | SLIDING LEG C-STAND

- 能调节第一只脚的高度，适应非水平面的地面工作。
- The height of the first foot can be adjusted to adapt to working on non-horizontal surfaces.

注：可调式魔术腿套装包含
(1支直径16mm持力臂，2个2.5"魔术头，1支魔术腿)
Note: SLIDING LEG C-STAND set includes
(one pcs 16mm EXTENSION GRIP ARM,two pcs 2.5"Grip Head,one pcs C-STAND)

20" C-STAND

CBA20" 魔术腿(黑色) CBA20"-4 魔术腿套装(黑色)
CSA20" 魔术腿(银色) CSA20"-4 魔术腿套装(银色)
CTA20" 魔术腿(不锈钢) CTA20"-4 魔术腿套装(不锈钢)

     
80cm 120cm 80cm 950cm 4.5kg 10kg

30" C-STAND

CBA30" 魔术腿(黑色) CBA30"-4 魔术腿套装(黑色)
CSA30" 魔术腿(银色) CSA30"-4 魔术腿套装(银色)
CTA30" 魔术腿(不锈钢) CTA30"-4 魔术腿套装(不锈钢)

     
110cm 210cm 110cm 950cm 5kg 10kg

40" C-STAND

CBA40" 魔术腿(黑色) CBA40"-4 魔术腿套装(黑色)
CSA40" 魔术腿(银色) CSA40"-4 魔术腿套装(银色)
CTA40" 魔术腿(不锈钢) CTA40"-4 魔术腿套装(不锈钢)

     
145cm 320cm 145cm 950cm 5.8kg 10kg

中心管 ∅ 35mm,30mm,25mm。脚管 ∅25mm; 壁厚: 1.5mm。
Pole ∅ :35mm,30mm,25mm。Leg ∅ :25m;thickness:1.5mm

快收式魔术腿

QUICK COLLECTION C-STAND

专利产品
PATENTED PRODUCT


MB40" 魔术腿(黑色) MB40"-4 魔术腿套装(黑色)
MS40" 魔术腿(银色) MS40"-4 魔术腿套装(银色)
MT40" 魔术腿(不锈钢) MT40"-4 魔术腿套装(不锈钢)

164cm 320cm 123cm 950cm 6.3kg 10kg

魔术腿，在影视、平面摄影行业应用广泛。我们对传统魔术腿部分进行了修改，只要用大母子推开头部凸出的按钮，在弹簧力的作用下，按钮离开卡位，然后，用力向右一甩，三只脚就张开，松开大拇指，按钮在弹簧力的作用下，恢复原位卡在凹槽处，三只脚就固定在所需的位置上。

C-STAND are widely used in film, television and photography. We have modified the traditional magic legs. Just push the button protruding from the head with the big mother and son. Under the action of the spring force, the button will leave the position. Then, throw it to the right with force, and the three legs will open. Release the thumb septum, and the button will return to its original position and be stuck in the groove under the action of the spring force. The three legs will be fixed in the required position.

魔术腿打开步骤：

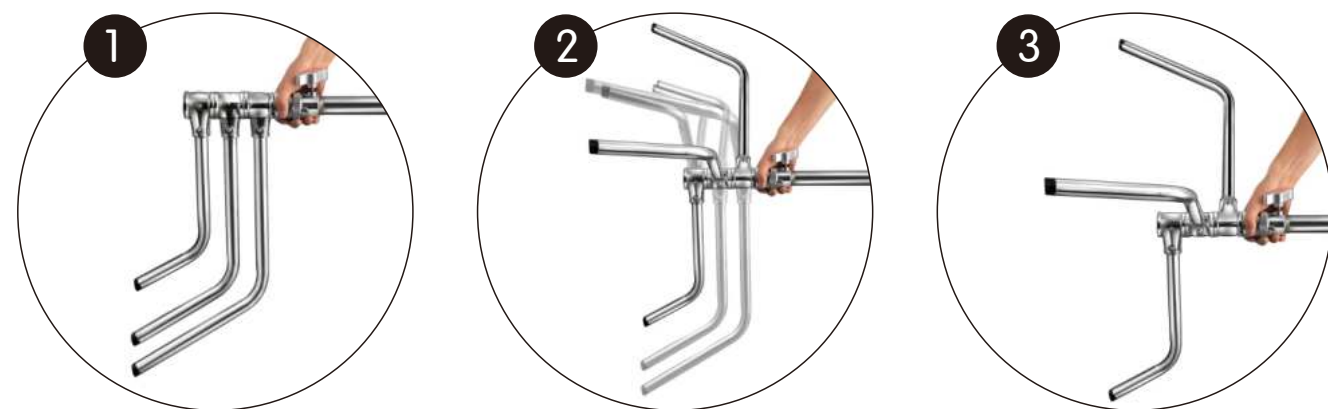

重型座机架(影棚必用设备)

HEAVY BASE FRAME (Necessary equipment for studio)

E01 重型座机架 (2.5M)
E02 重型座机架 (2.8M)





250/280cm



186kg

- 不用移动底座，正六角形中心中柱可360度水平转动
- 底座设有脚踏装置，可升降机架高度，方便座机移动
- There is no need to move the base, the center column of the regular hexagonal center can be 360-degree horizontal turn
- The base is equipped with a foot pedal device, which can raise and lower the height of the frame, it is convenient for landline mobile phones

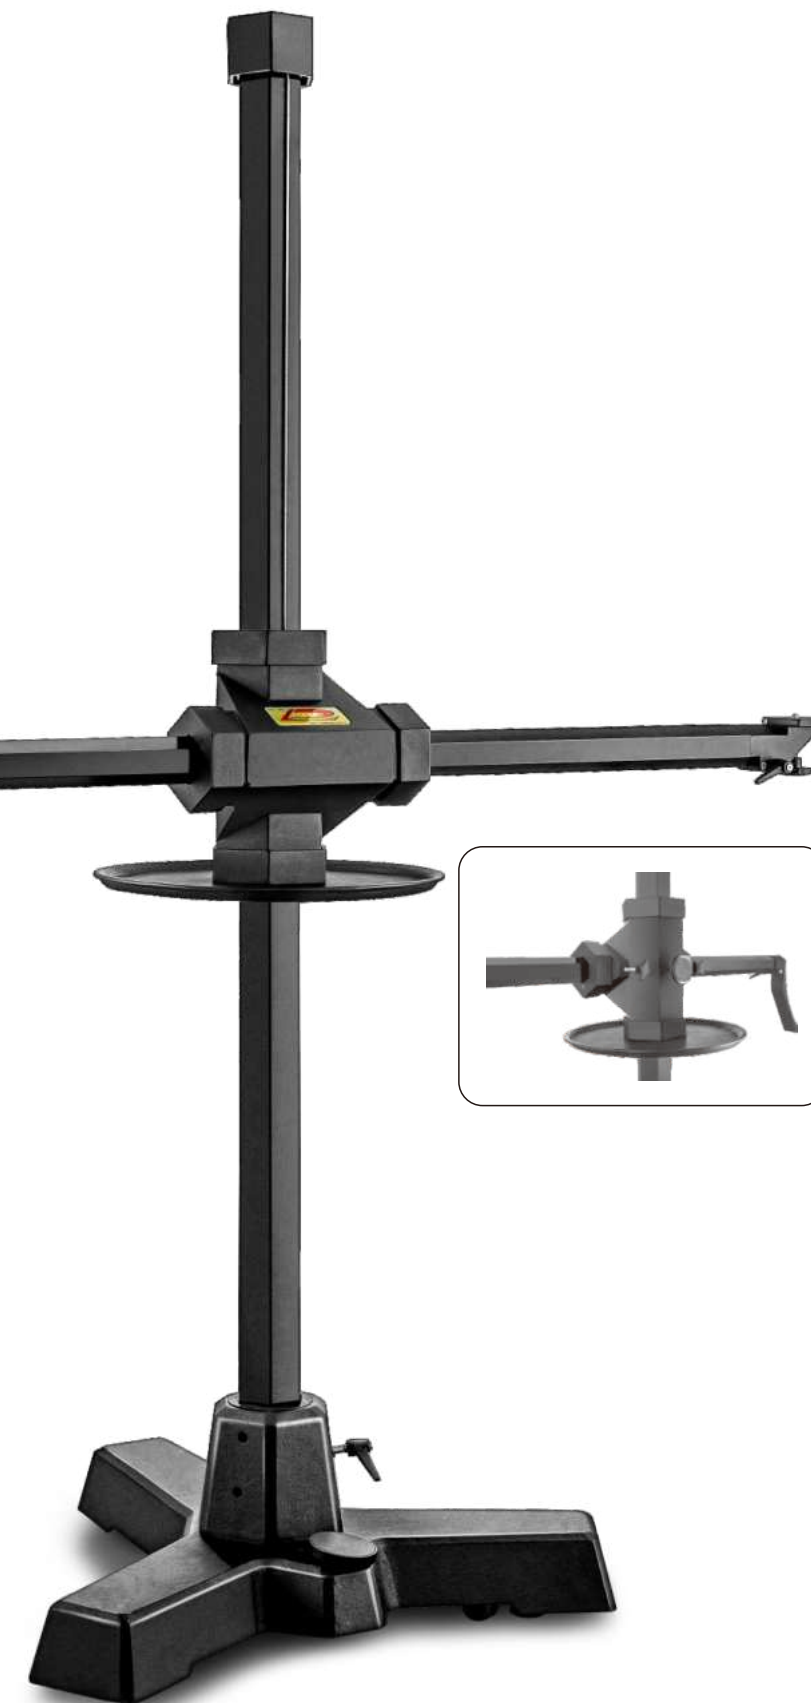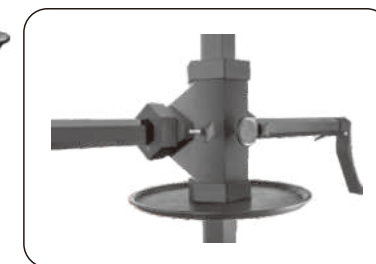



A201 轻型影视钢灯架

Chrome plated steel stand. 2 sections, 1 risers.
Ø: 42mm, 36mm. Leg Ø: 25mm. 1 levlling leg.



136cm 213cm 116cm 110cm 6.6kg 20kg



MF7602 轻型影视钢灯架

Chrome plated steel stand. 3 sections, 2 risers.
Ø: 35mm, 30mm, 25mm. Leg 20x20mm. 1 levlling leg.



126cm 260cm 105cm 100cm 5.7kg 10kg



A202 轻型影视钢灯架

Chrome plated steel stand. 3 sections, 2 risers.
Ø: 42mm, 36mm, 30mm. Leg Ø: 25mm. 1 levlling leg.



160cm 340cm 145cm 124cm 8.5kg 20kg



A203 轻型影视钢灯架

Chrome plated steel stand. 3 sections, 2 risers.
Ø: 42mm, 36mm, 30mm. Leg Ø: 25mm. 1 levlling leg.



150cm 300cm 134cm 124cm 7.8kg 30kg



A101/A102 轻型影视铝灯架

Aluminium stand. 4 sections, 3 risers.
Ø: 35mm, 30mm, 25mm, 20mm. Leg Ø: 22mm. 1 levlling leg.



92cm 280cm 90cm 95cm 3kg 7kg
120cm 360cm 112cm 110cm 3.6kg 7kg



MF7603/MF7604 轻型影视钢灯架

Chrome plated steel stand. 4 sections, 3 risers.
Ø: 35mm, 30mm, 25mm, 20mm. Leg 20x20mm. 1 levlling leg.



136cm 320cm 116cm 114cm 6.3kg 10kg
140cm 420cm 125cm 114cm 6.8kg 10kg



B308 中型影视灯架(铁电镀)
BT308 中型影视灯架(不锈钢)

Chrome plated steel stand. 3 sections, 2 risers.
Ø: 35mm, 30mm, 25mm. Leg 20x20mm. 1 levlling leg.



60cm 99cm 58cm 57cm 3.6kg 15kg



B309 中型影视灯架(铁电镀)
BT309 中型影视灯架(不锈钢)

Chrome plated steel stand. 3 sections, 2 risers.
Ø: 45mm, 40mm, 35mm. Leg 25x25mm. 1 levlling leg.



70cm 122cm 67cm 44cm 5.4kg 30kg



B301 中型影视灯架(铁电镀)
BT301 中型影视灯架(不锈钢)

Chrome plated steel stand. 2 sections, 1 riser.
Ø: 45mm, 40mm. Leg 25x25mm. 1 levelling leg.



B303 中型影视灯架(铁电镀)
BT303 中型影视灯架(不锈钢)

Chrome plated steel stand. 3 sections, 2 risers.
Ø: 45mm, 40mm, 35mm. Leg 25x25mm. 1 levelling leg.



B302 中型影视灯架(铁电镀)
BT302 中型影视灯架(不锈钢)

Chrome plated steel stand. 3 sections, 2 risers.
Ø: 45mm, 40mm, 35mm. Leg 25x25mm. 1 levelling leg.



B304 中型影视灯架(铁电镀)
BT304 中型影视灯架(不锈钢)

Chrome plated steel stand. 4 sections, 3 risers.
Ø: 45mm, 40mm, 35mm. Leg 25x25mm. 1 levelling leg.



海罗兰灯架 OVERHEAD STAND

- 海罗兰灯架设计用于支持蝴蝶框架和背景，由于其升高范围大，底座宽，使用场合较多。
- 支架顶部配有 115 厘米夹头，可容纳蝴蝶夹片；以及 28 毫米插座，可以插入小插头。带轮子的支架具有特殊铸件，可在存放期间保护轮子。
- 宽阔的底座可在最大高度实现最大的稳定性。

- Overhead stands are designed to support butterfly frames and backdrops, but their use is virtually limitless due to their high reach and wide base.
- The top of the stand is fitted with a 115cm grip head, which accepts the butterfly ears; and a 28mm socket for fixtures with a junior pin. The stands with wheels have a special casting to protect the wheels during storage.
- Wide base for greatest stability at maximum heights.



B305 中型海罗兰灯架(铁电镀) BT305 中型海罗兰灯架(不锈钢)

Chrome plated steel stand. 4 sections, 3 risers.
Ø: 45mm, 40mm, 35mm, 30mm. Leg 25x25mm.



B305C 加强型海罗兰灯架(铁电镀)

Chrome plated steel stand. 4 sections, 3 risers.
Ø: 55mm, 48mm, 42mm, 36mm. Leg 25x25mm.

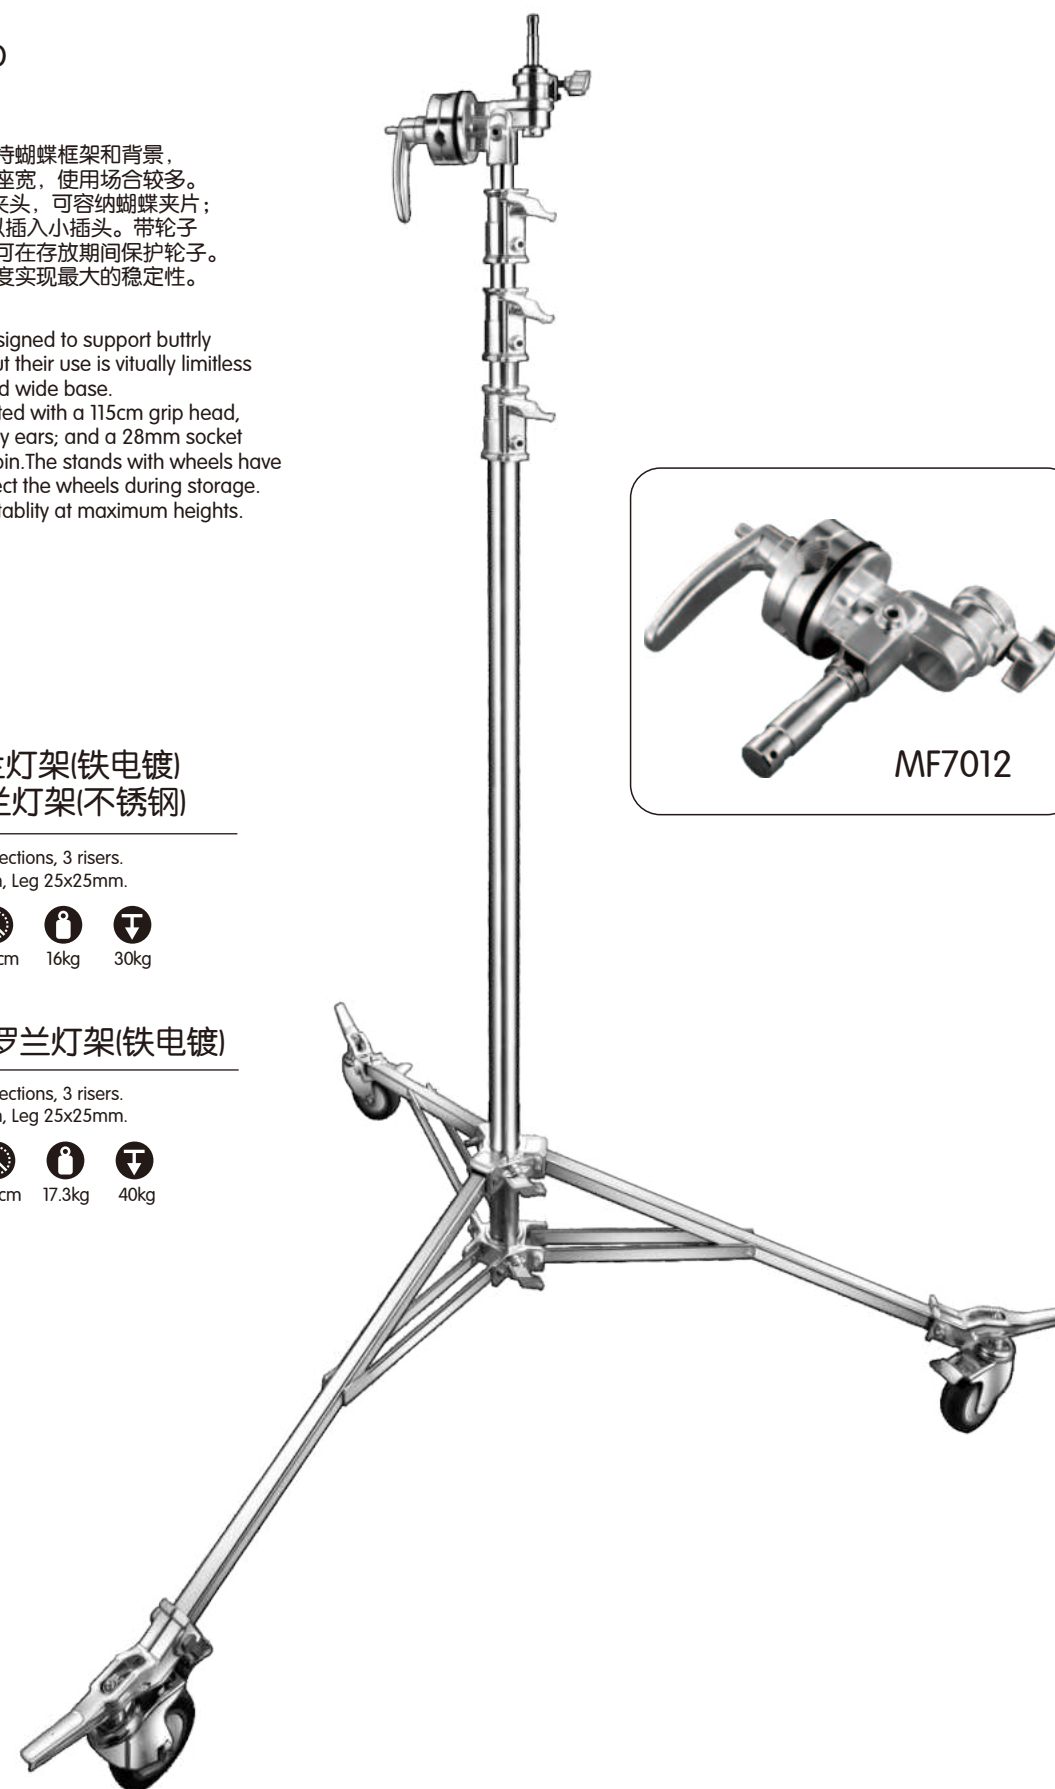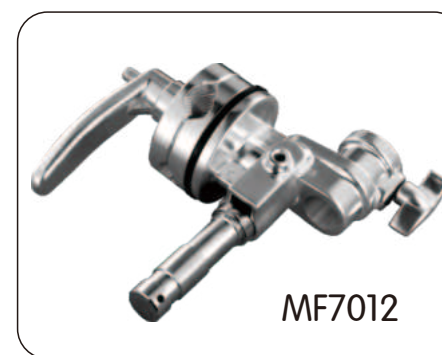



B305D 大型影视灯架(铁电镀)

Chrome plated steel stand. 4 sections, 3 risers.
Ø: 55mm, 48mm, 42mm, 36mm, Leg 30x30mm. 1 levelling leg.



B306 中型影视灯架(铁电镀)
BT306 中型影视灯架(不锈钢)

Chrome plated steel stand. 4 sections, 3 risers.
Ø: 45mm, 40mm, 35mm, 30mm, Leg 25x25mm. 1 levelling leg.



B307 中型影视灯架(铁电镀)
BT307 中型影视灯架(不锈钢)

Chrome plated steel stand. 4 sections, 3 risers.
Ø: 45mm, 40mm, 35mm, 30mm, Leg 25x25mm. 1 levelling leg.



BM301 道轨专用灯架

Chrome plated steel stand. 2 sections, 1 riser.
Ø: 45mm, 40mm. Leg 25x25mm. 2 levelling leg.




BM302 中型影视钢灯架

Chrome plated steel stand. 3 sections, 2 risers.
Ø: 45mm, 40mm, 35mm. Leg 25x25mm. 1 levelling leg.



BM303 中型影视钢灯架

Chrome plated steel stand. 3 sections, 2 risers.
Ø: 45mm, 40mm, 35mm. Leg 25x25mm. 1 levelling leg.

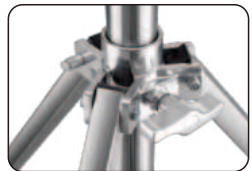

BM系列结构图

BM306 中型影视钢灯架

Chrome plated steel stand. 4 sections, 3 risers.
Ø: 45mm, 40mm, 35mm, 30mm. Leg 25x25mm. 1 levelling leg.



斜臂两用灯架 | OBLIQUE ARM DUAL-PURPOSE LIGHT STAND



MF7065 轻型斜臂两用灯架

Chrome plated steel stand. 4 sections, 3 risers.
 Ø: 35mm, 30mm, 25mm, 20mm, Leg 20x20mm.

142cm 420cm 130cm 120cm 7.6kg 5kg




MF7066 重型斜臂两用灯架

Chrome plated steel stand. 5 sections, 4 risers.
 Ø: 50mm, 45mm, 40mm, 36mm, 30mm, Leg 25x25mm.

160cm 345cm 154cm 110cm 13kg 20kg

Min boom extension 110cm—Max load 20kg
 Max boom extension 173cm—Max load 10kg



Min boom extension 153cm—Max load 7kg
 Max boom extension 187cm—Max load 5kg



MF7067 重型斜臂两用灯架

Chrome plated steel stand. 5 sections, 4 risers.
 Ø: 50mm, 45mm, 40mm, 36mm, 30mm, Leg 25x25mm.

200cm 560cm 170cm 230cm 18kg 20kg

Min boom extension 150cm—Max load 20kg
 Max boom extension 250cm—Max load 8kg

重型两用吊臂灯架 BOOM STANDS

MF6081 重型两用吊臂灯架

Chrome plated steel stand. 4 sections, 3 risers.
 Ø: 48mm, 42mm, 35mm, 30mm. Leg 25x25mm. 1 levelling leg.

196cm 494cm 173cm 144cm 15kg 30kg

特点：
 中心管可以直接拔出转换成吊臂，吊臂末端有圆孔，
 可以挂沙袋，平衡吊臂。


Features:
 The center tube can be directly pulled out and converted
 into a boom. There is a round hole at the end of the boom
 to hang sandbags and balance the boom.



Min extension boom 148cm—Max load 30kg
 Max extension boom 250cm—Max load 8kg

手摇灯架 WIND UP STAND

Chrome or stainless steel, single and double risers which extend simultaneously
Fold away crank handle
Third internal safety cable ensures simultaneous retrieval of all risers
Levelling leg for easy positioning and stability
Double braced leg base for extra stability and safety

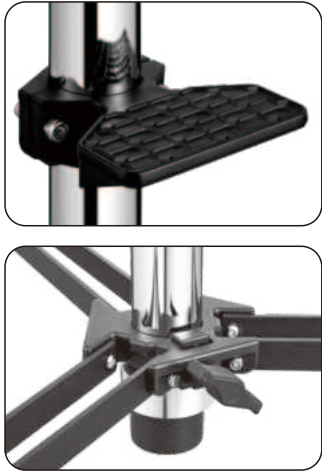

C701 中型手摇灯架

Chrome plated steel stand. 3 sections, 2 risers.
Ø: 55mm, 45mm, 38mm. Leg Ø: 30mm. 1 levelling leg.

- 180cm
- 380cm
- 190cm
- 128cm
- 24kg
- 30kg




C701A 中型手摇灯架

Chrome plated steel stand. 2 sections, 1 riser.
Ø: 55mm, 45mm. Leg Ø: 30mm. 1 levelling leg.

- 180cm
- 264cm
- 170cm
- 128cm
- 20.5kg
- 45kg

手摇灯架 WIND UP STAND

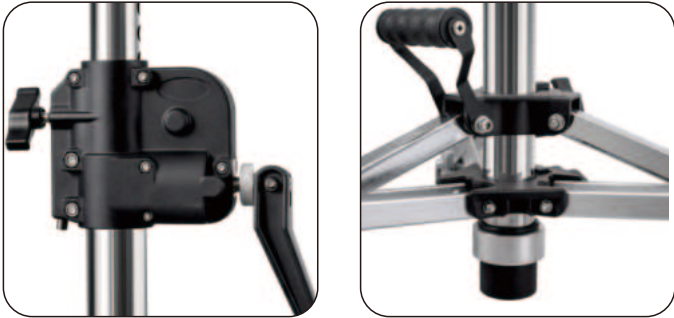

C701B 轻型手摇灯架

Chrome plated steel stand. 2 sections, 1 riser.
Ø: 55mm, 45mm. Leg Ø: 30mm. 1 levelling leg.

- 111cm
- 152cm
- 118cm
- 88cm
- 14.5kg
- 25kg



C701C 中型手摇灯架

Chrome plated steel stand. 3 sections, 2 risers.
Ø: 55mm, 45mm, 38mm. Leg 25x25mm. 1 levelling leg.


- 165cm
- 339cm
- 157cm
- 130cm
- 15kg
- 30kg

手摇灯架 WIND UP STAND



C702 大型手摇灯架

Chrome plated steel stand. 3 sections, 2 risers.
 Ø:70mm,60mm,50mm.Leg Ø:35mm.1 levelling leg.



C703 大型手摇灯架

Chrome plated steel stand. 2 sections, 1 riser.
 Ø:70mm,60mm.Leg Ø:35mm.1 levelling leg.



手摇重型吊臂 MEGA BOOMS

最大的悬臂杆，可远程调节水平、垂直和旋转以及齿轮伸缩延伸。
 由黑色锌钢和黑色阳极氧化铝管组合而成。随附沙袋。
 Largest cantilever with remote adjustment of horizontal, vertical and swivel as well as telescopic extension of gears. It is made of a combination of black zinc steel and black anodized aluminum tubes. Sandbags included.



MF6088 手摇重型吊臂

Largest boom in the range, remote control of pan, tilt and rotation of lamina plus geared telescopic extension. Combination of black zinc steel and black anodised aluminium tubes. Supplied with sandbag.
 2 sections (Ø: 45, 60mm).
 Min boom extension 230cm—Max load 30kg
 Max boom extension 320cm—Max load 8kg



通过齿轮传递：
 吊臂能做到水平、垂直、旋转、伸缩四个功能，
 能轻松调整灯具的位置。

Transmission through gears:
 The boom can achieve four functions:
 horizontal, vertical, rotating and telescopic,
 The position of lamps can be easily adjusted.

MF6089 手摇重型吊臂钢架（套装）

Chrome plated steel stand.3sections,2 risers.
 Ø:55mm,45mm,38mmmm. Ø30mm.1 levelling leg.



重型手摇灯架

STRATO SAFE STAND

D801 重型手摇灯架

Aluminum legs with chrome steel column.
Features braked wheels. 2 sections, 1 riser.
Ø : 70mm, 60mm. Leg 35x35mm.



D802 重型手摇灯架

Aluminum legs with chrome steel column.
Features braked wheels. 3 sections, 2 riser.
Ø : 90mm, 80mm, 70mm. Leg 35x35mm.



D803 重型手摇灯架

Aluminum legs with chrome steel column.
Features braked wheels. 4 sections, 3 riser.
Ø : 90mm, 80mm, 70mm, 60mm. Leg 35x35mm.




重型手摇灯架


STRATO SAFE STAND

D804重型手摇灯架超越行业要求，
可在高达70Kg重载下进行超安全操作。
双安全带直接驱动齿轮结构和二级安全锁。
标准版本均配备带制动天然橡胶脚轮。
The D804 heavy duty hand crank light stand
exceeds industry requirements and can be
operated ultra-safely under heavy loads up
to 70Kg. Double safety belt direct drive gear
structure and secondary safety lock.
Standard versions are equipped
with natural rubber castors with brakes.

采用高强度铝合金铸造
It is cast with high-strength
aluminum alloy




二级安全锁
Secondary Safety lock




齿轮升降系统
Crank-up gear systems

易于使用的曲柄摇把
Easy to use ratchet
crank handle



加强型提手
Reinforced handle

采用镀铬或不锈钢钢管
Available in chrome-plated
or non-cast steel pipes

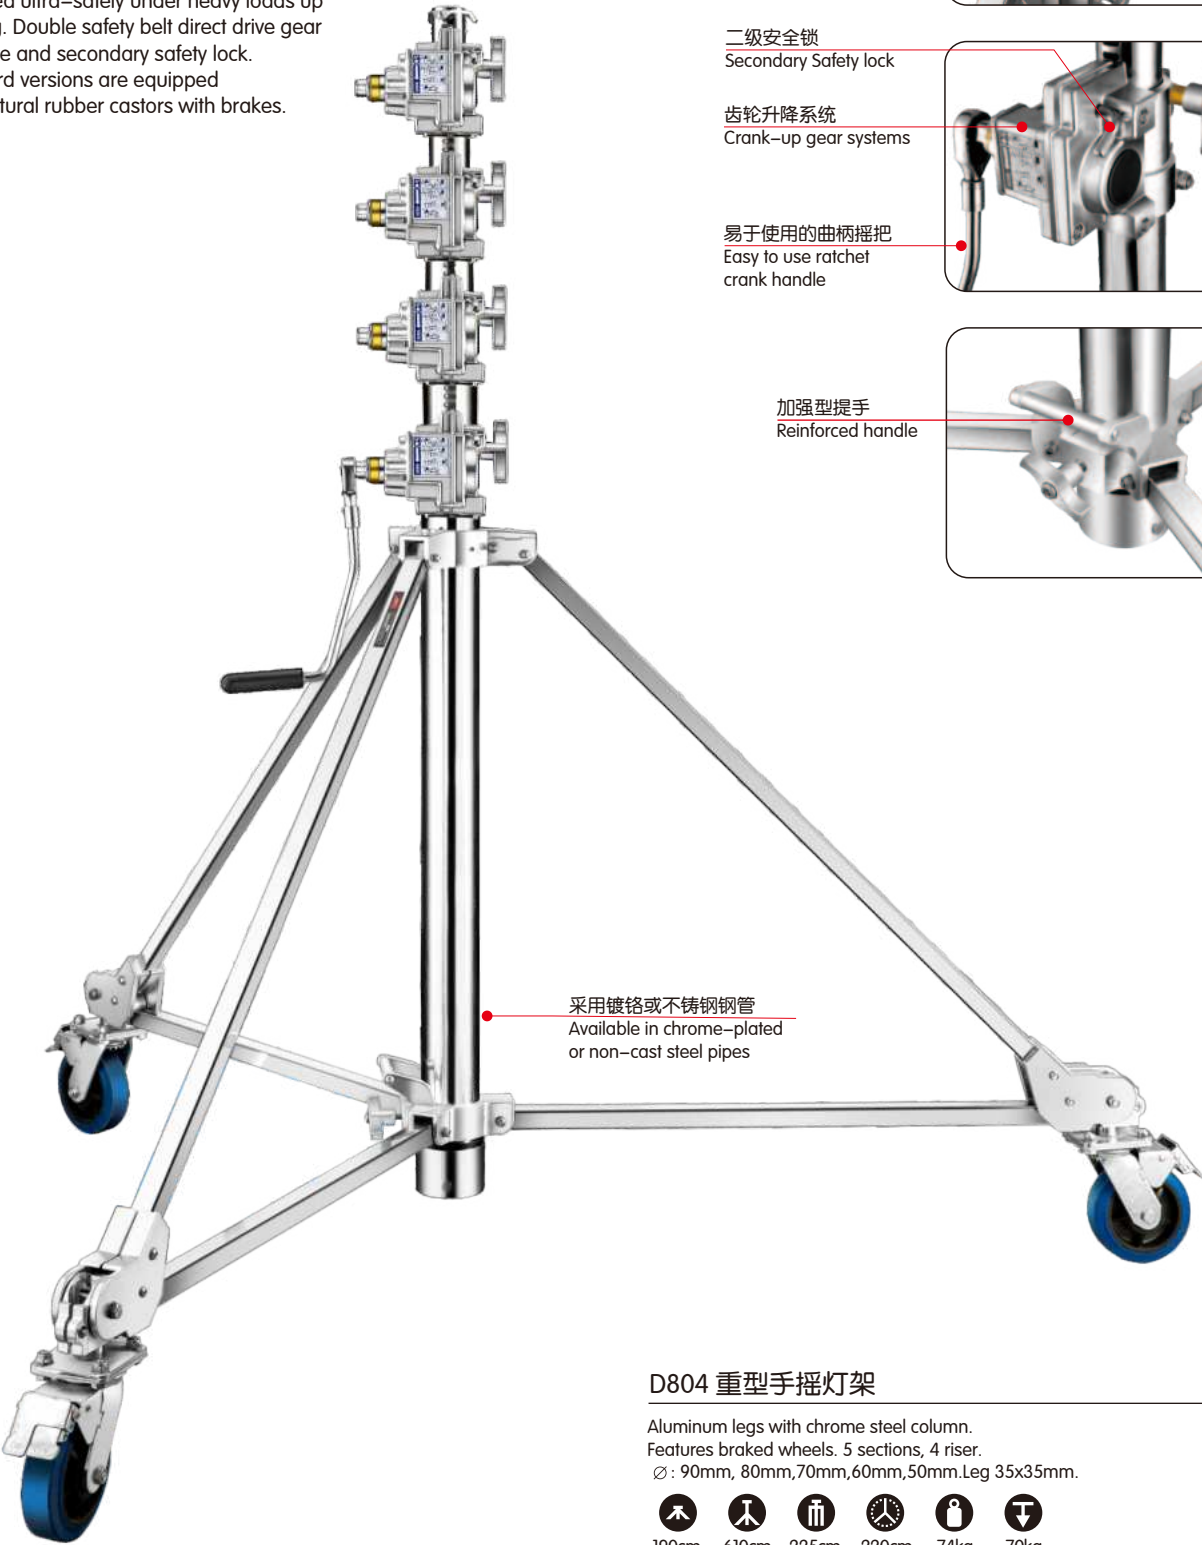

D804 重型手摇灯架

Aluminum legs with chrome steel column.
Features braked wheels. 5 sections, 4 riser.
Ø : 90mm, 80mm, 70mm, 60mm, 50mm. Leg 35x35mm.



150MM碗口摄影机脚架

150MM BOWL CAMERA TRIPOD

- 采用高强度铝合金材料制造
- 铝型材表面经过硬氧处理
- 各种部件加工精度高，操作时很流畅精准

- Made of high-strength aluminum alloy material.
- The surface of the aluminum profile is hard oxygen treatment.
- All kinds of parts have high processing precision, and the operation is smooth and accurate.



E601 高架

Aluminium stand.
Leg Ø:25mm.3 levelling leg.



E602 中架

Aluminium stand.
Leg Ø:25mm.3 levelling leg.



E603 低架

Aluminium stand.



150MM平口摄影机脚架

150MM FLAT BOWL CAMERA TRIPOD



E605 高架

Aluminium stand.
Leg Ø:25mm.3 levelling leg.



E607 低架

Aluminium stand.



E606 中架

Aluminium stand.
Leg Ø:25mm.3 levelling leg.



E604

高架、中架各配套一个塑料桶
One plastic bucket shall be provided for the overhead and middle racks respectively.

导演车-基础款

DIRECTOR CAR-Basics

- 专业导演车，移动数码工作站
- 装载两个带刹车万向轮
- 折叠设计，携带方便
- 静音万向轮

- Professional director car, mobile digital workstation
- Load two universal wheels with brakes
- Foldable design, easy to carry
- Silent universal wheels



PDL-MC122

尺寸/SIZE: 120x60x95mm
重量/WEIGHT: 35.6kg

航空箱尺寸/Airbox size: 122x68x30cm
航空箱重量/Flight case weight: 24kg



导演车-升级款

DIRECTOR CAR-Upgraded

- 专业导演车，移动数码工作站
- 装载两个带刹车万向轮
- 折叠设计，携带方便
- 静音万向轮
- 扩展支架，灯具及配件安装

- Professional director car, mobile digital workstation
- Load two universal wheels with brakes
- Foldable design, easy to carry
- Silent universal wheels
- Installation of extension brackets, lamps and accessories



PDL-MC121

尺寸/SIZE: 120x60x135mm
重量/WEIGHT: 38kg

航空箱尺寸/Airbox size: 122x68x42cm
航空箱重量/Flight case weight: 24kg



导演车-豪华款

DIRECTOR CAR-Deluxe

- 专业导演车，移动数码工作站
- 装载两个带刹车万向轮
- 折叠设计，携带方便
- 带锁抽屉，高度调节平台
- 静音万向轮
- 扩展支架，灯具及配件安装
- 监视器支架
- 圆碗托盘
- 小平台

- Professional director car, mobile digital workstation
- Load two universal wheels with brakes
- Foldable design, easy to carry
- Drawer with lock, height adjustment platform
- Silent universal wheels
- Installation of extension brackets, lamps and accessories
- Monitor bracket
- Round bowl tray
- Small platform



PDL-MC120

尺寸/SIZE: 120x60x135mm
重量/WEIGHT: 47kg

航空箱尺寸/Airbox size: 122x68x42cm
航空箱重量/Flight case weight: 24kg

数码移动工作台
DIGITAL MOBILE WORKSTATIONS

- 带刹车万向轮
- 折叠设计，携带方便
- 带锁抽屉，高度调节平台
- 静音万向轮
- 扩展支架，灯具及配件安装
- 监视器支架

- Universal wheels with brakes
- Foldable design, easy to carry
- Drawer with lock, height adjustment platform
- Silent universal wheels
- Extension brackets, lamps and accessories are installed
- Monitor bracket



PDL-MC125

Aluminium stand. 3 sections, 2 risers.
Ø: 45mm, 40mm, 35mm. Leg 25x25mm.

- 134cm
- 280cm
- 120cm
- 110cm
- 7.9kg
- 30kg




PDL-MC126

Aluminium stand. 2 sections, 1 riser.
Ø: 40mm, 40mm. Leg 25x25mm.

- 123cm
- 195cm
- 109cm
- 110cm
- 6.5kg
- 30kg


铝合金旗板 ALUMINUM ALLOY FLAG BOARD

主要作用于光线柔化而不影响方向和色温，适用于强硬光线的影片拍摄。
采用高强度空心四方形材制造，轻并强度高。
It is mainly used to soften the light without affecting the direction and color temperature, it is suitable for shooting films with strong light.
It is made of high-strength hollow square material, which is light and has good strength.

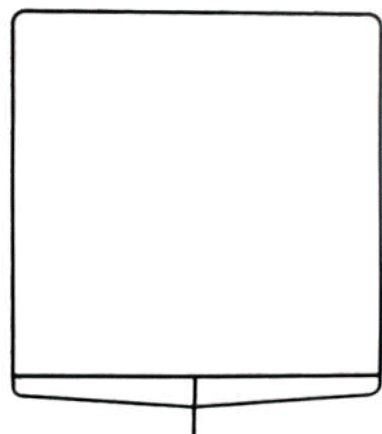

大号: PDL-AI-120x120

Size: 120x120cm
Weight: 1.5kg
Cloth: White/Black Cloth

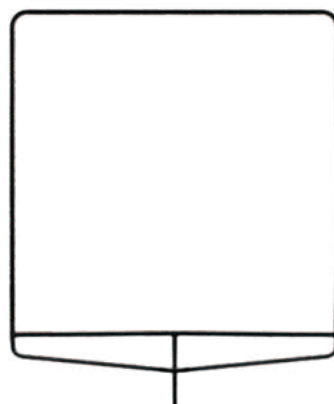

中号: PDL-AI-90x90

Size: 90x90cm
Weight: 1.1kg
Cloth: White/Black Cloth



小号: PDL-AI-60x90

Size: 60x90cm
Weight: 0.85kg
Cloth: White/Black Cloth

铝制框架 ALUMINUM FRAMES

这款轻便的便携式反框架系统安装快速简便，光线控制不受限制。
每个框架的角部均采用铰链连接，并具有可拆卸接头，安装和拆卸方便。
框架可自动锁定到位，为各种织物和光线控制应用提供坚固的支撑。
This lightweight, portable reflector system offers fast and easy setup and unlimited light control. Each frame is hinged at the corners and features dismantling joints, making setup and breakdown easy. Frames self-lock into position, forming rigid supports for a wide variety of fabrics and light-control applications.



RM7232

Frame Size: 107x198cm

RM7262

RM7270



RM7222

Frame Size: 107x107cm

蝴蝶布框 BUTTERFLY CLOTH FRAME

采用方形高强度铝合金制造，设计独特，产品折叠后总长度才1.3米
便于组装、拆卸，运输和存储。
It is Made Of Square High-strength Aluminum Alloy With Unique Design.
Which Is Convenient For Assembly,
Disassembly, Transportation And Storage



MH01

Frame Size(cm): 244x244cm
Frame Size(feet): 8x8'



MD01

Frame Size(cm): 244x244cm
Frame Size(feet): 8x8'

MD02


Frame Size(cm): 366x366cm
Frame Size(feet): 12x12'



MH-08 展架

Frame Size: 120x105x500cm
Weight: 15kg


背景架套装 BACKDROP SET

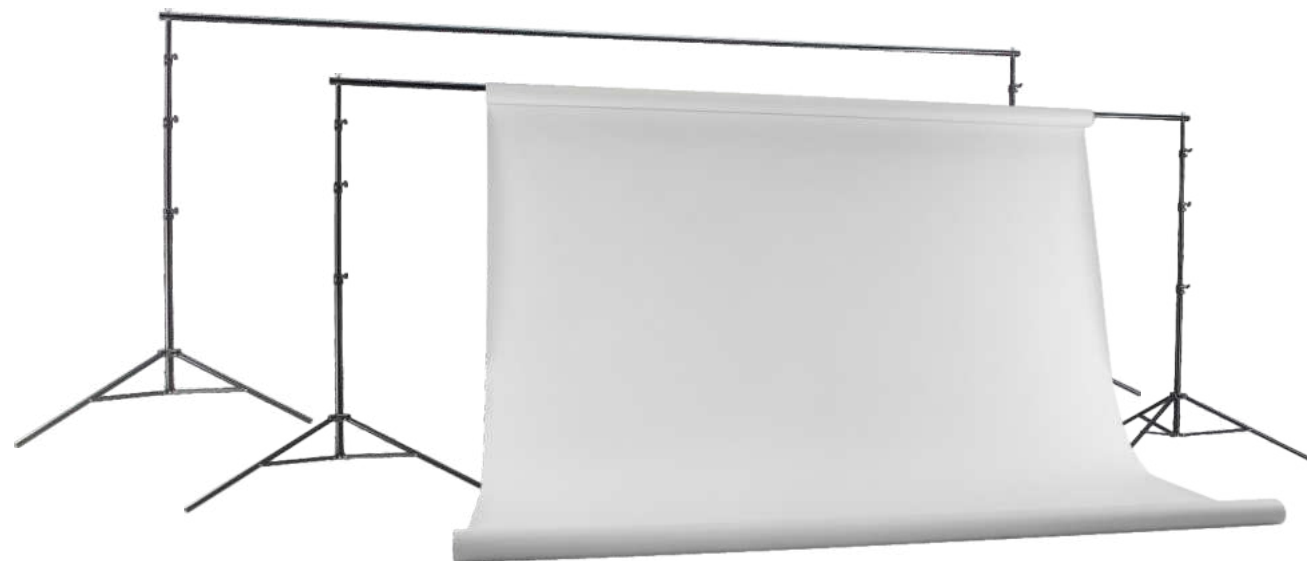

MF6090 BACKGROUND SUPPORT

套装包括两个铝制支架、一个四节铝制横杆和一个耐用的织物手提箱。支架最大高度2.7米。背景最大宽度3.6米。包总长112厘米。重量约20KG。这个四节杆可延伸至12英尺(3.6米)。

Package includes two aluminum stands, one four-section aluminum crossbar and a durable fabric carrying case. Maximum stand height 9' (2.7m). Maximum background width 12' (3.6m). Overall bag length 44" (112cm). Approximate weight 17 lbs. (20kg). This four-section bar extends to 12' (3.6m).

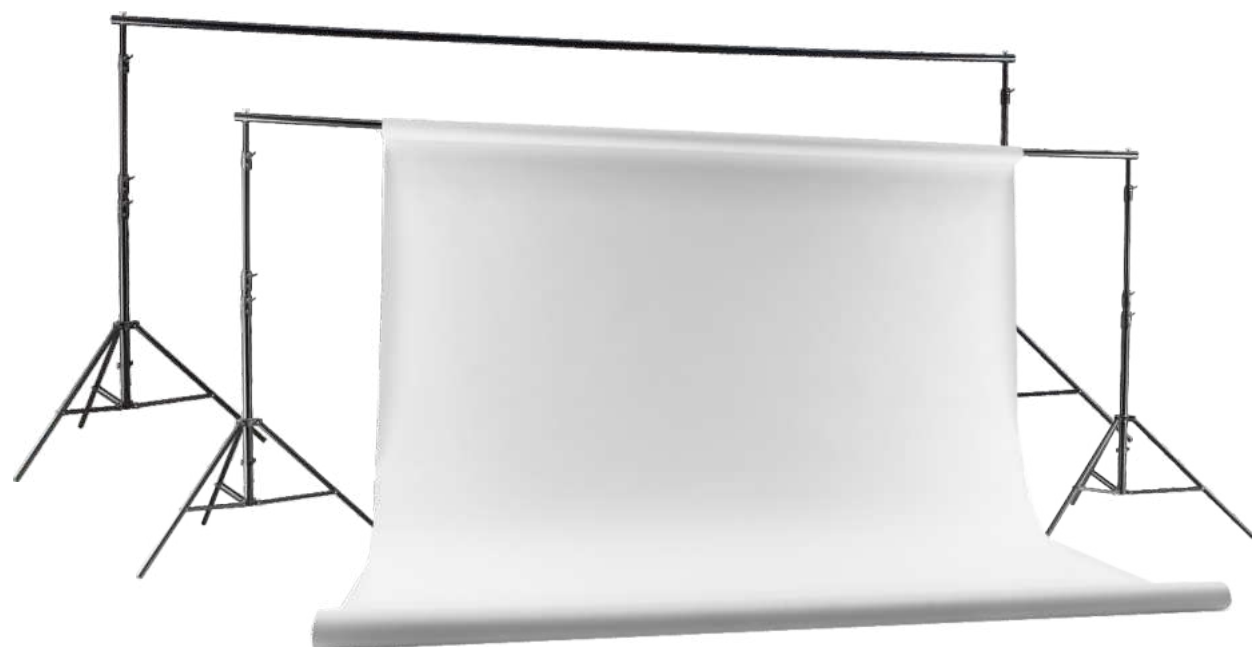

MF6095 BACKGROUND SUPPORT

完美支撑系统，可支撑135厘米和272厘米纸质或平纹细布背景，宽度可达3.6米。包装内含两个重型支架；一个重型四节横杆和一个手提箱。最大支架高度：3.6米。最大背景宽度3.6米。

Perfect support system for 53" (135cm) and 107" (272cm) paper or muslin backgrounds up to 12' (3.6m) wide. Package consists of two heavy-duty stands; one heavy-duty, four-section crossbar and a carrying case. Maximum stand height: 12' (3.6m). Maximum background width: 12' (3.6m).



MF2014S BACKGROUND SUPPORT

设计用于支撑背景纸卷或背景纸片或任何其他地面材料。该套件包括：

- 1 x 3节2013B伸缩杆
- 2 x 2.8m支架、
- 1 x 灯架套件包。

Designed to support rolls or sheets of background paper or any other ground material. The kit comprises of:

- 1 x 3 Section Telescopic Pole Art. 2013B,
- 2 x 2.8m Stand,
- 1 x Transport Kit Bag.



2013S (SILVER) / 2013B (BLACK)

3节伸缩背景杆。
最小伸展：124cm。
最大伸展：304cm。
重量：0.87kg。

3-section telescopic backdrop rod.
Minimum extension: 124cm.
Maximum extension: 304cm.
Weight: 0.87kg.

拍摄台 SHOOTING STAGE



20-710(小台面) / 20-711(大台面)

台面距离地面83cm,背面可调节倾度,台面宽100cm、长240cm,与台面宽130cm、长240cm两种规格;台面采用德国进口胶板。

The table top is 83cm from the ground; the inclination of the back can be adjusted; the table top is available in two specifications: 100cm wide and 240cm long, and 130cm wide and 240cm long; the table top is made of plastic board imported from Germany.

小拍摄台 TABLETOP STUDIO

Here is the ultimate in portability and convenience when it comes to small-product tabletop photography. The Tabletop Studio is a lightweight and compact shooting surface that is perfect for small objects such as jewelry, models, the Tabletop Studio sets up in seconds to provide a professional-quality, seamless shooting surface that can be lit from any direction, including below the subject. It can be placed either on the ground or on any smooth flat surface.



RM1017

轻质金属框架具有铰链式前后腿和铰链式后背, 可将其折叠平放, 占用最小的存储或运输空间。整个拍摄台重量仅为 7.5 磅 (3.4 KG), 组装后外部尺寸非常实用, 为 27.5 x 23.25 x 21.6 英寸 (70 x 59 x 55 厘米)。

The lightweight metal frame features hinged front and rear legs and a hinged back, allowing it to be folded flat, taking up minimum storage or transport space. The entire Tabletop Studio weighs just 7.5 lbs. (3.4 kg) and assembles to a very practical outside dimension of 27.5 x 23.25 x 21.6" (70 x 59 x 55cm).

RM1018

RM1018 便携式拍摄桌提供 61 x 61cm 的拍摄表面, 并具有可调节的倾斜度。该桌子非常适合产品摄影, 由于其表面为半透明, 因此可以从下方照明。该拍摄桌仅重 4.84kg, 组装后尺寸为 61x61x111cm。便携式拍摄桌用途多样, 可以拆卸并装入旅行包中携带到下一个拍摄地点。

The RM1018 Portable Shooting Table provides a 24 x 24" shooting surface with an adjustable sweep. The table is great for product photography and can be lit from below thanks to its translucent surface. The shooting table weighs only 10lbs 12oz (4.84kg), and assembles to a dimension of 24 x 24 x 43" (61 x 61 x 111cm). Adding to its versatility, the Portable Shooting Table can be disassembled and carried to your next location shoot in its travel bag.



多功能夹具
MULTI-FUNCTIONAL FIXTURE



MF6822
Can be clamped: 5–40mm
Weight : 0.22kg
Size: 152x100x92mm



MF6822F
Can be clamped: 5–40mm
Weight : 0.38kg
Size: 155x100x155mm



MF6818
Can be clamped: 15–36mm
Weight : 0.16kg
Size: 62x130mm



MF6823
Weight : 0.1kg
Size: 150x80mm



BW1100
Weight : 0.14kg
Size: 82x75mm



MF6820
Can be clamped: 5–51mm
Weight : 0.5kg
Size: 150x61.5x85mm



MF6819
Can be clamped: 5–35mm
Weight : 0.25kg
Size: 83x49x80mm



MF6820F
Can be clamped: 5–51mm
Weight : 1.07kg
Size: 150x61.5x170mm



W552
Can be clamped: 10–35mm
Weight : 0.32kg
Size: 82x75mm



W550
Can be clamped: 5–65mm
Weight : 0.72kg
Size: 240x53mm



W551
Can be clamped: 5–65mm
Weight : 0.64kg
Size: 240x53mm



W500
Can be clamped: 6–80mm
Weight : 1.36kg
Size: 365x80mm



MF6806
Can be clamped: 13–35mm
Weight : 0.11kg
Size: 65x40x50mm



MF6821
Can be clamped: 5–51mm
Weight : 1.15kg
Size: 190x150mm




W501
Can be clamped: 28–75mm
Weight : 1.9kg
Size: 370x170mm



MF7012
Joint: 28mm
Weight : 1.2kg
Size: 240x262mm

摄影配件
PHOTOGRAPHIC ACCESSORIES

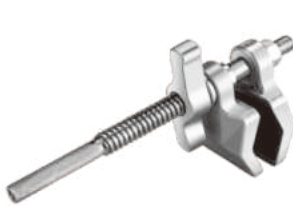

W033
Can be clamped: 15–60mm
Weight : 0.3kg
Size: 181x98x72mm



W034
Can be clamped: 16–65mm
Weight : 0.6kg
Size: 186x98x80mm



W035
Can be clamped: 16–65mm
Weight : 0.64kg
Size: 203x98x80mm




W036
Can be clamped: 16–200mm
Weight : 0.76kg
Size: 320x98x80mm



W037
Can be clamped: 16–420mm
Weight : 1.1kg
Size: 570x98x80mm



MF1671
3" baby wall plate
Weight : 0.45kg
Size: 80x150x74mm
Joint: $\varnothing$ 16mm



MF1672
6" baby wall plate
Weight : 0.58kg
Size: 80x150x154mm
Joint: $\varnothing$ 16mm



MF1673
9" baby wall plate
Weight : 0.72kg
Size: 80x150x224mm
Joint: $\varnothing$ 16mm



MF1674
Baby plate with
90° pin swivel spigot
Weight : 0.68kg
Size: 80x150x144mm
Joint: $\varnothing$ 16mm



MF1675
Baby wall plate
Weight : 0.9kg
Size: 80x150x189mm
Joint: $\varnothing$ 16mm



MF1676
Junior wall plate
Weight : 0.76kg
Size: 80x150x124mm
Joint: $\varnothing$ 29mm



MF1677
Baby plate with 16mm
Weight : 0.58kg
Size: 80x150x64mm
Joint: $\varnothing$ 16mm



MF1678
Cheapter wall plate
Weight : 0.47kg
Size: 80x150x80mm
Joint: $\varnothing$ 16mm



FK01
Splint size: 16–30mm
Size: 90x30x140mm
Joint: $\varnothing$ 50mm hole



FK02
Splint size: 16–30mm
Size: 90x30x82mm
Joint: $\varnothing$ 16mm male



FK03
Splint size: 16–30mm
Size: 90x30x88mm
Joint: $\varnothing$ 16mm female

摄影配件
PHOTOGRAPHIC ACCESSORIES



MF6808
1/4" threads – $\varnothing$ 16mm hole
Weight : 0.1kg
Size: $\varnothing$ 25x59mm



MF6809
3/8" threads – $\varnothing$ 16mm hole
Weight : 0.1kg
Size: $\varnothing$ 25x55mm



MF6829
Flash holder – umbrella connector
16mm connector
Weight : 0.2kg
Size: 40x105mm



MF6830
16mm connector – umbrella joint
Weight : 0.34kg
Size: 105x114mm



MF6817
3/8" threads – $\varnothing$ 16mm hole
1/4" threads – $\varnothing$ 16mm hole
Weight : 0.5kg
Size: 146x122mm



MF6826
16mm connector
Weight : 0.18kg
Size: 200x73mm



MF6827
16mm connector
Weight : 0.4kg
Size: 500x73mm



MF6887
16mm connector – $\varnothing$ 35mm
Weight : 0.63kg
Size: 450x40mm



MF6831
16mm connector–19mm notch
Weight : 0.52kg
Size: 82x136mm



MF6828
16mm connector–45mm mount
Weight : 0.12kg
Size: long 100mm



MF6833
19mm notch



MF6832
19mm notch



MF6863
16mm connector–1/4" –3/8"
Weight : 0.18kg
Size: $\varnothing$ 17.5x340mm



MF6864
16mm connector–1/4" –3/8"
Weight : 0.36kg
Size: $\varnothing$ 13x560mm



MF6866
16mm connector–1/4" –3/8"
Weight : 0.64kg
Size: $\varnothing$ 17.5x560mm



MF6204
Stand turntable
Weight : 0.8kg
Size: 135x100x200mm

摄影配件
PHOTOGRAPHIC ACCESSORIES



CK7981
1/4" threads – 3/8" threads
Weight : 1.2kg
Size: 590mm



产品效果图



IV-1206
16mm connector
Weight : 1.42kg
Size: 28.5x50mm/16x16mm



产品效果图



CK7030
1/4" turn 3/8" thread
Weight : 0.66kg
Size: 35.5x25.5x4mm



产品效果图

CK7031
16mm connector
Weight : 1.36kg
Size: 28.5x50mm



CK7032
16mm connector
Weight : 1.42kg
Size: 28.5x50mm/16x16mm



MF6837
Can be clamped: 26–50mm
Weight : 0.04kg



MF150
1/4" turn 3/8" thread
16mm connector
Weight : 0.9kg
Size: 540x115mm



MF6212/MF6805
Can be clamped: 20–35mm
Weight : 4kg/5kg
Size: 12x11x14mm



6KG BAG
Weight : 0.06kg
Size: 17.5x13mm



10KG BAG
Weight : 0.21kg
Size: 20.5x33.5mm



BK01



BK02



BK03



BK04

摄影配件
PHOTOGRAPHIC ACCESSORIES



RD6230



RD6245



RD6225



RD6255



RD6250



RD6220



RD6215



RD6210



MF6802

Leg: $\varnothing 22\text{mm}$
Weight : 0.14kg
Size: 120x55x42mm



MF6803

Leg: $\varnothing 22\text{mm}$
Weight : 0.75kg
Size: 175x125x60mm



MF6804

Leg: $\varnothing 22\text{mm}$
Weight : 0.84kg
Size: 190x145x60mm



MF6800

Leg: 25x25mm
Weight : 1.12kg
Size: 175x220x65mm



FK04 显示器卡座

16mm connectors
Screw holes: $\varnothing 5\text{mm}$
Weight : 0.44kg
Plate size: 120x120x3mm



MF511

Extended boom



MF6860

Diffuser paper holder



MF6862

Extended boom

转接配件
ADAPTER ACCESSORIES



MF6812

16mm universal connector,
Available with 1/4" and 3/8" threads



MF6813

16mm hexagonal side joint,
With 3/8" thread



MF6814

16mm hexagonal
Available with 3/8" and 1/4" threads



MF6815

16mm hexagonal
With 3/8" and 1/4" female threads



MF6816

90 degree to 45 degree hexagonal joint



MF6829C

Cylindrical joints,
Available with 1/4" and 3/8" female
threads



MF6830C

16mm universal connector,
Available with 1/4" male and 3/8"
female threads



MF6830M

16mm cylindrical joint,
Available with 1/4" male and 3/8"
male threads



MF6830F

Cylindrical joints,
Available with 1/4" and 3/8" female
threads



LP653

16mm hexagonal side joint,
Available with 1/4" and 3/8" male
threads



LP683

16mm hexagonal edge joint type
With 1/4" male thread



LP684

17mmx83mm long fittings



MF001

1/4" male to 3/8" female



MF6812C

16mm universal connector, iron plating



LP685

16mm hexagonal bolt at the bottom end,
Length 105mm connector, iron plating



MF7019

28mm to 16mm connector, iron plating

魔术腿配件
MAGIC LEG ACCESSORIES

魔术腿通常与魔术头、魔术臂（直径16mm、壁厚2mm钢管）配合使用，它可以支撑小型的闪光灯、旗板、钨丝灯等。

Magic legs are usually used with magic heads, magic arms (16mm diameter, 2mm wall thickness steel pipes),It can support small flashes, flags, tungsten lights, etc.



MF201 (2.5"魔术头 魔术臂)



MF202 (3"魔术头 魔术臂)



MF7009 (2.5"魔术头)



MF7008 (3"魔术头)



MF7100 (双头夹)



延伸杆

延伸杆与魔术腿配合，使用范围更广。

EXTENSION ROD

The extension rod is mated with the magic leg for a wider range of use.

独脚架
MONOPOD



CK7102

153cm 51cm 5kg



CK7104

165cm 47cm 5kg



CK7108

165cm 54cm 12kg



CK7109 (碳纤维)

197cm 61cm 6.4kg



CK8106 (碳纤维)

187cm 52cm 6.4kg



CK8104 (碳纤维)

159cm 52cm 6.4kg



CK7114

 150cm
  55cm
  1.7kg
  6kg



CK7316

 170cm
  61cm
  2.2kg
  8kg



CK7800

 200cm
  80cm
  4.3kg
  12kg



CK7500

 174cm
  64cm
  2.3kg
  10kg



CK8133A(铝) / CK8133(碳纤维)

 147cm
  57cm
  1.5kg/1.36kg
  10kg



CK8145A(铝) / CK8145(碳纤维)

 174cm
  64cm
  1.86kg/1.4kg
  10kg



CK8157A(铝) / CK8157(碳纤维)

 177cm
  58cm
  2.1kg/1.6kg
  10kg



CK8122

 159cm
  44cm
  1.3kg
  12kg



CK7061



CK7114A



CK7058



CK7316A



CK7064



CK9065



CK7033



CK6245



CK7052



CK7010A (快装板)



CK7001



CK9001



CK9007



CK708



CK709



CK710

PDL-1-200RGB

单头彩色太空灯 >>

全色域RGBWW灯具，外观小巧便携，精准控光，适用于各种摄影场所及创意拍摄。

SINGLE-HEAD COLORED SPACE LIGHT >>

Rgbww lamps with full color domain, small and portable appearance, Precise light control, suitable for all kinds of photography places and Creative shooting.




产品特点 | Product Features


- 光效高，光品好，显色指数高达95以上，还原真实色彩
The light efficiency is high, the light quality is good, the color rendering index is as high as 95 or more, and the true color is restored
- 高效散热，内置风扇，自带温度保护，延长灯珠使用寿命
Efficient heat dissipation, built-in fan, built-in temperature protection, prolonging the service life of lamp beads
- 色温精准，1600K ~ 20000K任意调节
The color temperature is accurate, 1600K~20000K can be adjusted arbitrarily
- 具有控制器无线远程控制，接线远程控制和灯体自带控制三种控制方式
It has three control modes: wireless remote control of the controller, remote control of wiring and control of the lamp body

- V口电池供电，方便户外拍摄
V-mount battery powered, convenient for outdoor shooting
- 体积小，重量轻，携带带
Small size, light weight, easy to carry
- HSI 360° 任意调节
HSI 360° arbitrary adjustment


产品附件 | Product accessories

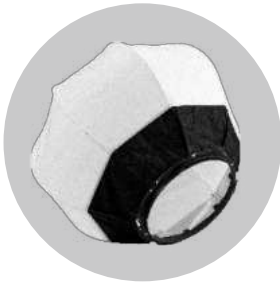

SF034 灯笼罩
Lantern shroud

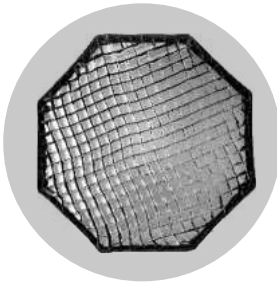

SF033 顶灯浅口蛋格罩
Overhead light shallow egg lattice cover



SF030 深口蛋格罩
Deep-mouthed egg lattice cover



SF030 深口蛋格罩接口
Deep-mouth egg crate cover interface



SF034 灯笼罩布包
Lantern cover cloth bag



SF029 灯体包
Lamp body package



SF028 电源线
Power cord



SF002 5M信号线
5m signal line

灯光参数 | Light Parameters

距离 DISTANCE	1M	3M	6M
光照度(LUX)5600K	5500	700	200
光照度(LUX)3200K	4200	600	140

详情参数 | Detail Parameters

型号 MODEL	市电输入 MAINS INPUT	色温 COLOR TEMPERATURE	调光范围 DIMMING	工作环境温度 WORK TEMPERATURE	颜色 COLOR	地址码 ADDRESS CODE	频道 CHANNEL	标准配置 STANDARD CONFIGURATION	可选配件 OPTIONAL ACCESSORIES
PDL-1-200RGB	100 ~ 240V 功率:200W	1600-20000K	0-100%	-10 ~ 50℃	HSI360可调 全色域	512*8	DMX512协议 (2.4G外置天线)	单头太空灯X1 5米电源线X1 便携包X1	深口蛋格罩x1 灯笼罩x1 顶灯蛋格罩x1 信号线x1 512控制器x1
电池输入 BATTERY INPUT	电池续航时间 BATTERY LIFE	风扇 FAN	尺寸 SIZE	重量 WEIGHT	8种控制模式 8 CONTROL MODES			显色性 COLOR RENDERING	
14.8V/10AH 功率:100W 兼容D-TAP 插头直流供电	满功率使用约 90分钟，电池 容量越大续航 时间越长	灯头温度达到 55℃ 时风扇 启动，温度越高， 转速越快	430*340*104mm（灯 不含电池） 500*370*100mm（单头灯便携包） φ 300*660mm（灯笼便携包）	3.6kg（灯 不含电池） 0.55kg（单头灯便携包） 4.9kg（一套标配灯总重，含配件便携包） 2.3kg（灯笼便携包）	色温模式/色调模式/色坐标模式/ 特别色温模式/四基色模式/预置色模式 /效果模式/色卡模式			TLCI≥95 CRI≥95	

两头彩色太空灯 >>

外观小巧便携，精准控光，满足拍摄需求，适用于各种摄影场所及创意拍摄。

TWO-ENDED COLORED SPACE LIGHTS >>

Compact and portable, precise light control, to meet the needs of shooting, suitable for a variety of photography places and creative shooting.



电池款

- 电源输入AC100-240V
- 电池输入DC14.8V/10AH*2个V口电池
兼容D-TAP插头直流供电

Battery

- Power input AC100-240V
- Battery input DC14.8V/10AH *2 V-mount batteries,
compatible with D-TAP plug DC power supply

常规款

- 电源输入AC100-240V
无电池供电

Regular

- Power input AC100-240V
Battery-free



坚固铝材/轻便耐用
Strong Material/Light And Durable



组合设计/节省空间
Combination Design
Save Space



静音风扇/智能温控
Quiet Fan/Intelligent
temperature control



无线模式/远程控制
Wireless Mode/Remote Control



简单操作/精准调光
Simple Operation/Precise Dimming



高显指/无频闪
High Finger
No Stroboscopic Light



体积小/重量轻/携带带
Small size / light weight / portable belt




电池供电/轻便外拍/
超长续航/智能供电
Battery powered / portable outdoor shooting/
Super long endurance / intelligent power supply




发光角度60°C
The luminescence
Angle is 60°C


产品结构 | Product mix

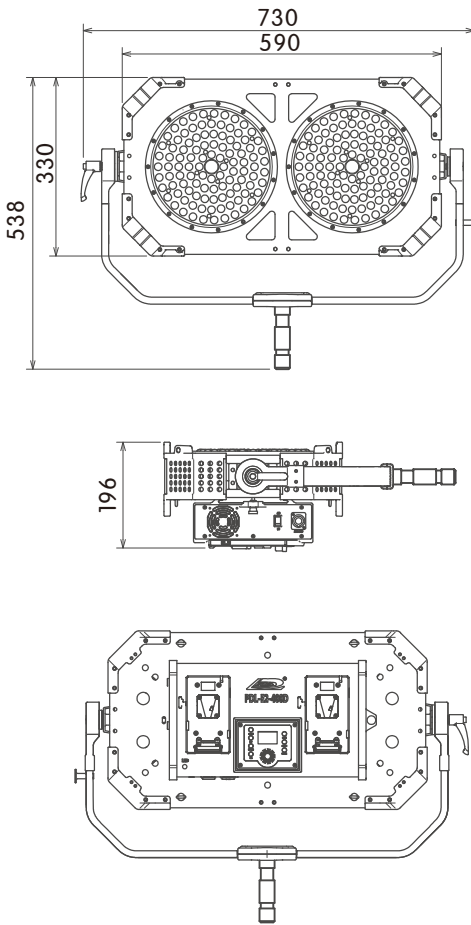

显色指数图 | Color rendering index chart

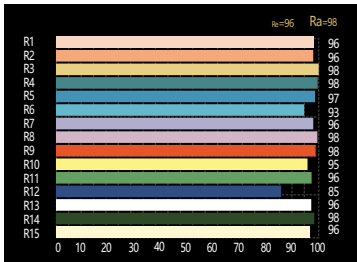


3200K

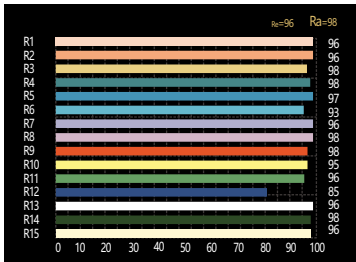


5600K

光谱测试 | Spectral test

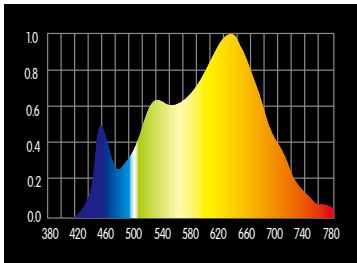

3200K

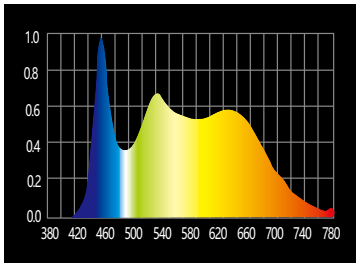

5600K

灯光参数 | Light Parameters

PDL-2-400RGB	1M	3M	6M
3200K	9800Lux	1320Lux	440Lux
5600K	10100Lux	1440Lux	520Lux

详情参数 | Detail Parameters

型号 MODEL	市电输入 MAINS INPUT	色温 COLOR TEMPERATURE	调光范围 DIMMING	工作环境温度 WORK TEMPERATURE	颜色 COLOR	地址码 ADDRESS CODE	频道 CHANNEL	标准配置 STANDARD CONFIGURATION	可选配件 OPTIONAL ACCESSORIES
PDL-2-400RGB	100 ~ 240V 功率:350W	1600-20000K	0-100%	-10 ~ 50°C	HSI360可调 全色域	512*8	DMX512协议 (2.4G外置天线)	太空灯*1 电源线*1	信号线*1 蛋壳罩*1 控制台*1 航空箱*1
电池输入 BATTERY INPUT	电池续航时间 BATTERY LIFE	风扇 FAN	尺寸 SIZE		重量 WEIGHT		8种控制模式 8 CONTROL MODES		显色性 COLOR RENDERING
14.8V/10AH*2 功率:240W 兼容D-TAP 插头直流供电	满功率使用约 90分钟, 电池 容量越大续航 时间越长	灯头温度达到 50°C 时风扇 启动,温度越高, 转速越快	730*538*196mm (裸灯) L750*W22*H570mm (外纸箱)		11.2kg (裸灯) 15.3kg (一套标配灯 总重, 含包装)		色温模式/色调模式/色坐标模式/ 特别色温模式/四基色模式/预置色模式 /效果模式/色卡模式		TLCI ≥ 95 CRI ≥ 95

PDL-3-500RGB

三头彩色太空灯 >>

外观小巧便携，精准控光，满足拍摄需求，适用于各种摄影场所及创意拍摄。

THREE-HEADED COLORED SPACE LIGHTS >>

Compact and portable, precise light control, to meet the needs of shooting, suitable for a variety of photography places and creative shooting.



产品特点 | Product Features



坚固铝材/轻便耐用
Strong Material/Light And Durable



组合设计/节省空间
Combination Design
Save Space



静音风扇/智能温控
Quiet Fan/Intelligent
temperature control



无线模式/远程控制
Wireless Mode/Remote Control



简单操作/精准调光
Simple Operation/Precise Dimming



高显指/无频闪
High Finger
No Stroboscopic Light




体积小/重量轻/携带带
Small size / light weight / portable belt




发光角度60°
The luminescence
Angle is 60°


产品结构 | Product mix

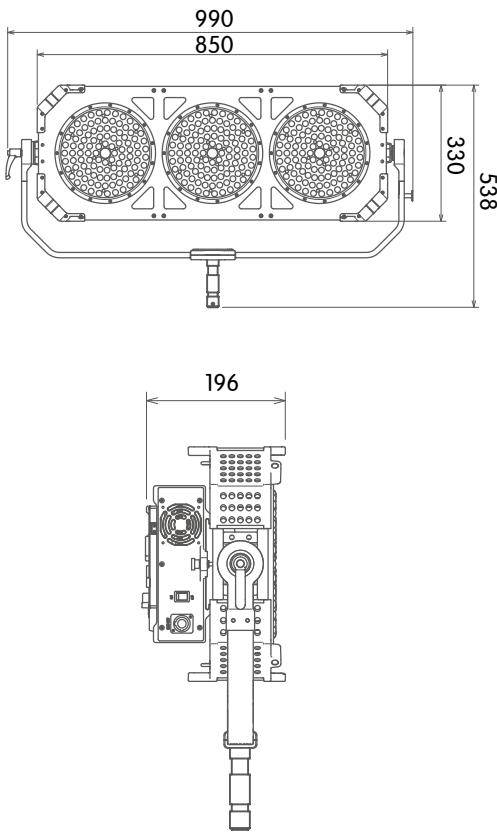

显色指数图 | Color rendering index chart

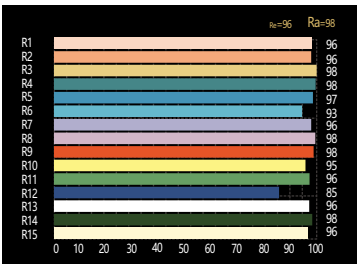


3200K

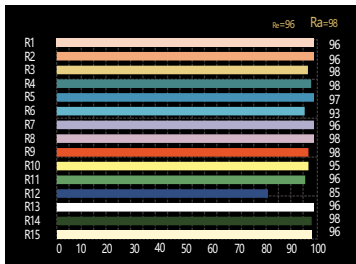


5600K

光谱测试 | Spectral test

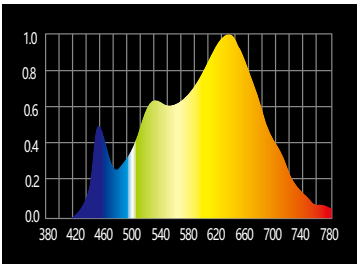

3200K

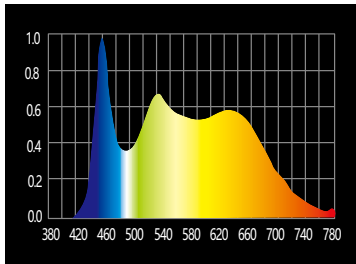

5600K

灯光参数 | Light Parameters

PDL-3-500RGB	1M	3M	6M
3200K	13800Lux	1980Lux	614Lux
5600K	14700Lux	2090Lux	680Lux

详情参数 | Detail Parameters

市电输入 MAINS INPUT	调光 DIMMING	光色输出 CASE	工作温度 WORK TEMPERATURE	色差 COLOR DIFFERENCE	重量 WEIGHT	显色性 COLOR RENDERING	标准配置 STANDARD CONFIGURATION	可选配件 OPTIONAL ACCESSORIES
450W AC:100-240V	0-100%	HSI 360° 1600-20000K	-10 - 50℃	± 100K	14.2KG	TLCI > 95 CRI > 95	太空灯*1 电源线*1	信号线*1 遥控器*1 控制台*1 航空箱*1
8种控制模式 8 CONTROL MODES						风扇 FAN		
色温模式/色温模式/色坐标模式/特别色温模式/四基色模式/预置色模式/效果模式/色卡模式 CCT / HSI / XY / CCT-S / RGBW / SET-C / LEE / EFFECT						灯头温度达到50℃ 时风扇启动,温度越高,转速越快 When the temperature of the lamp head reaches 50° C, the fan starts, the higher the temperature, the faster the rotational speed		


PDL-4-600RGB

四头彩色太空灯 >>

外观小巧便携，精准控光，满足拍摄需求，适用于各种摄影场所及创意拍摄。

FOUR-HEADED COLORED SPACE LIGHTS >>

Compact and portable, precise light control, to meet the needs of shooting, suitable for a variety of photography places and creative shooting.

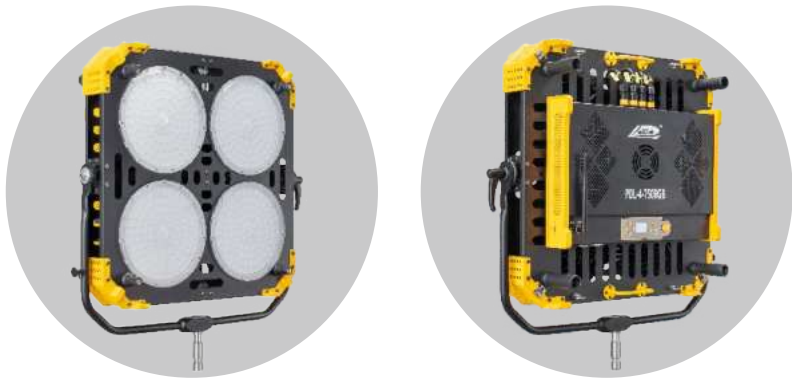

产品特点 | Product Features



坚固铝材/轻便耐用
Strong Material/Light And Durable



组合设计/节省空间
Combination Design
Save Space



静音风扇/智能温控
Quiet Fan/Intelligent
temperature control



无线模式/远程控制
Wireless Mode/Remote Control



简单操作/精准调光
Simple Operation/Precise Dimming



高显指/无频闪
High CRI
No Stroboscopic Light




体积小/重量轻/便携带
Small size / light weight / portable




发光角度60°
The luminescence
Angle is 60°


产品结构 | Product mix

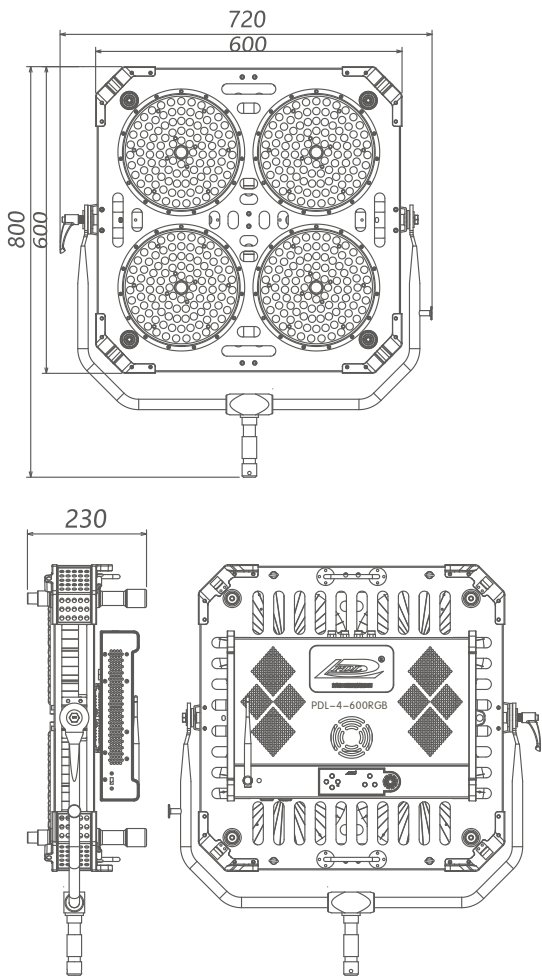

显色指数图 | Color rendering index chart

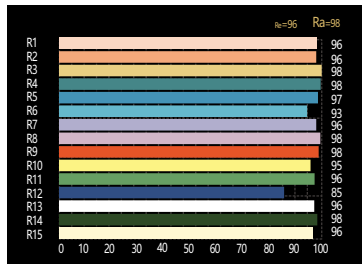


3200K

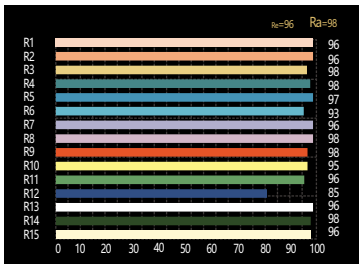


5600K

光谱测试 | Spectral test

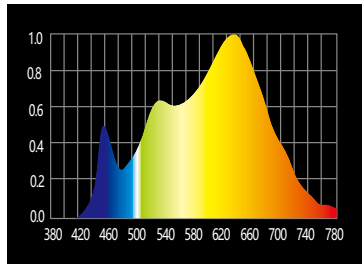

3200K

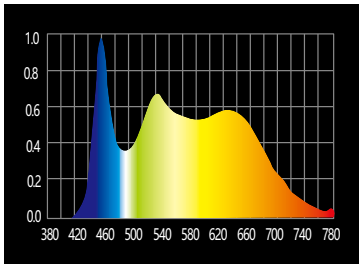

5600K

灯光参数 | Light Parameters

PDL-4-600RGB	1M	3M	6M
3200K	18100Lux	3280Lux	920Lux
5600K	19200Lux	3500Lux	1020Lux

详情参数 | Product Introduction

市电输入 MAINS INPUT	调光 DIMMING	光色输出 CASE	工作温度 WORK TEMPERATURE	色差 COLOR DIFFERENCE	重量 WEIGHT	显色性 COLOR RENDERING	标准配置 STANDARD CONFIGURATION	可选配件 OPTIONAL ACCESSORIES
600W AC100-240V	0-100%	HSI 360° 1600-20000K	-10 ~ 50℃	± 100K	21.5KG	TLCI > 95 CRI > 95	太空灯*1 电源线*1 吊绳*1	蛋壳罩*1 黑白罩*1 控制台*1 航空箱*1
8种控制模式 8 CONTROL MODES					风扇 FAN			
色温模式/色温模式/色坐标模式/特别色温模式/四基色模式/预置色模式/效果模式/色卡模式 CCT / HSI / XY / CCT-S / RGBW / SET-C / LEE / EFFECT					灯头温度达到70℃ 时风扇启动,温度越高, 转速越快 When the temperature of the lamp head reaches 70° C, the fan starts, the higher the temperature, the faster the rotational speed			

PDL-6-900RGB

六头彩色太空灯 >>

外观小巧便携，精准控光，满足拍摄需求，适用于各种摄影场所及创意拍摄。

SIX COLORED SPACE LIGHTS >>

Compact and portable, precise light control, to meet the needs of shooting, suitable for a variety of photography places and creative shooting.



产品特点 | Product Features



坚固铝材/轻便耐用
Strong Material/Light And Durable



组合设计/节省空间
Combination Design
Save Space



静音风扇/智能温控
Quiet Fan/Intelligent
temperature control



无线模式/远程控制
Wireless Mode/Remote Control



简单操作/精准调光
Simple Operation
Precise Dimming



高显指/无频闪
High Finger
No Stroboscopic Light




体积小/重量轻/便携带
Small size / light weight / portable belt




发光角度60°
The luminescence
Angle is 60°


产品结构 | Product mix

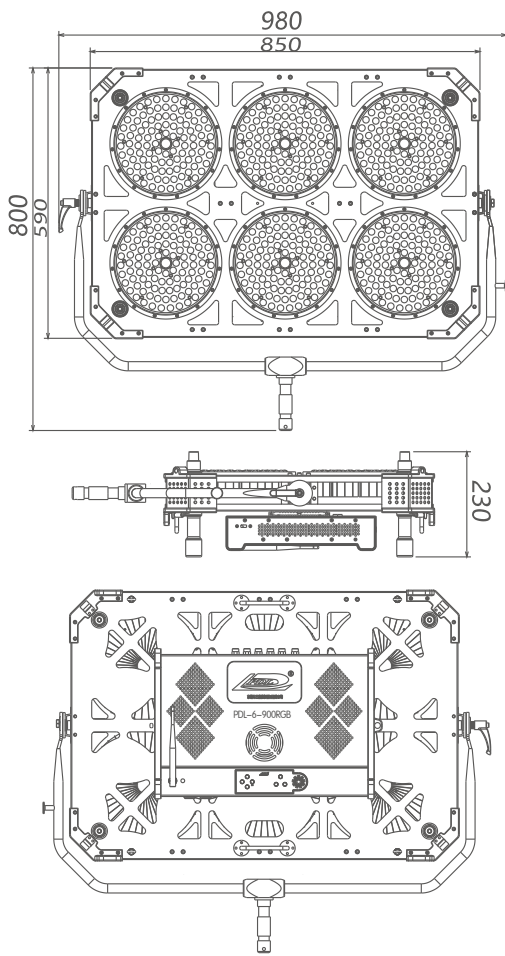

显色指数图 | Color rendering index chart

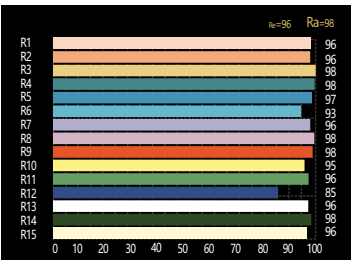


3200K

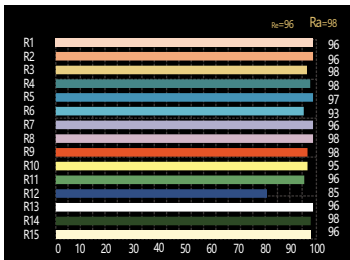


5600K

光谱测试 | Spectral test

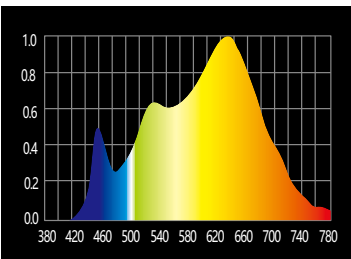

3200K

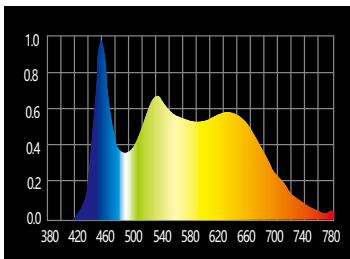

5600K

灯光参数 | Light Parameters

PDL-6-900RGB	1M	3M	6M
3200K	27300Lux	5230Lux	1540Lux
5600K	29100Lux	5400Lux	1680Lux

详情参数 | Product Introduction

市电输入 MAINS INPUT	调光 DIMMING	光色输出 CASE	工作温度 WORK TEMPERATURE	色差 COLOR DIFFERENCE	重量 WEIGHT	显色性 COLOR RENDERING	标准配置 STANDARD CONFIGURATION	可选配件 OPTIONAL ACCESSORIES
900W AC:100-240V	0-100%	HSI 360° 1600-20000K	-10 ~ 50℃	±100K	27.5KG	TLCI > 95 CRI > 95	太空灯*1 电源线*1 吊绳*1	蛋壳罩*1 黑白罩*1 控制台*1 航空箱*1
8种控制模式 8 CONTROL MODES					风扇 FAN			
色温模式/色调模式/色坐标模式/特别色温模式/四基色模式/预置色模式/效果模式/色卡模式 CCT / HSI / XY / CCT-S / RGBW / SET-C / LEE / EFFECT					灯头温度达到70℃ 时风扇启动,温度越高, 转速越快 When the temperature of the lamp head reaches 70° C, the fan starts, the higher the temperature, the faster the rotational speed			


PDL-9-1400RGB

九头彩色太空灯 >>

外观小巧便携，精准控光，满足拍摄需求，适用于各种摄影场所及创意拍摄。

NINE-HEADED COLORED SPACE LIGHTS >>

Compact and portable, precise light control, to meet the needs of shooting, suitable for a variety of photography places and creative shooting.

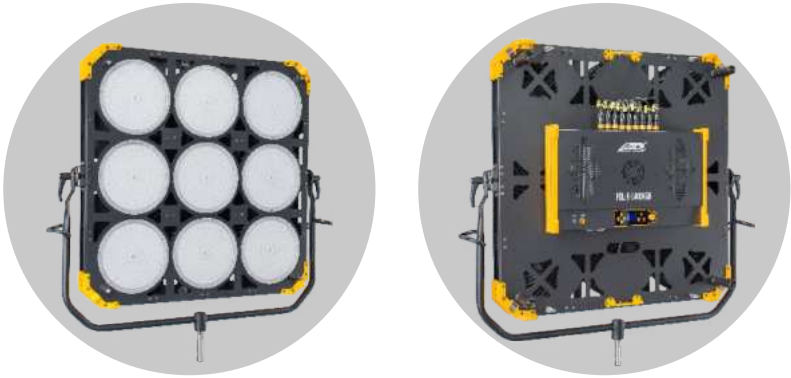

产品特点 | Product Features



坚固铝材/轻便耐用
Strong Material/Light And Durable



组合设计/节省空间
Combination Design
Save Space



静音风扇/智能温控
Quiet Fan/Intelligent
temperature control



无线模式/远程控制
Wireless Mode/Remote Control



简单操作/精准调光
Simple Operation/Precise Dimming



高显指/无频闪
High CRI
No Stroboscopic Light




体积小/重量轻/携带方便
Small size / light weight / portable




发光角度60°
The luminescence
Angle is 60°


产品结构 | Product mix

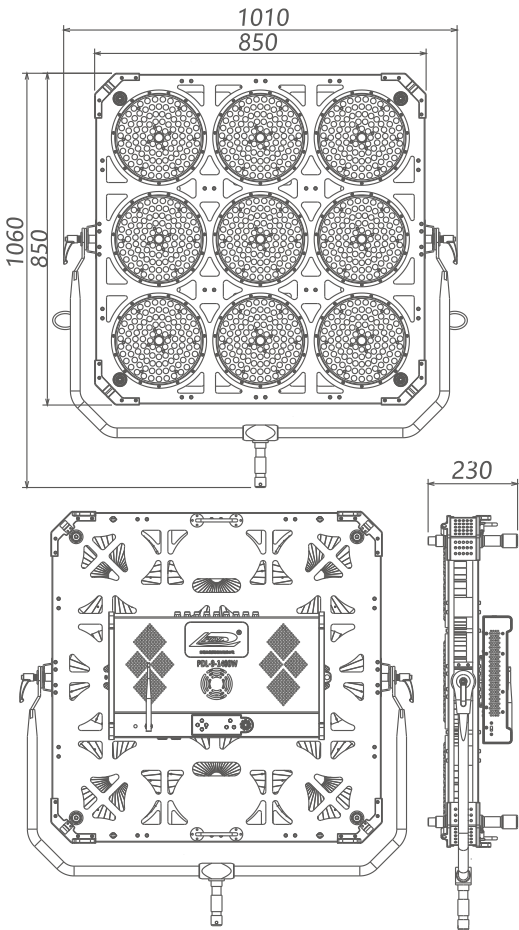

显色指数图 | Color rendering index chart

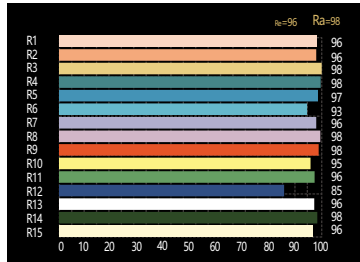


3200K

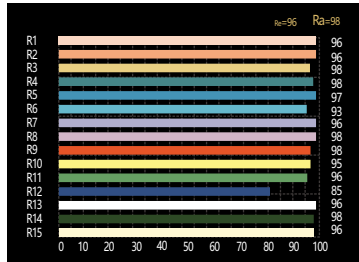


5600K

光谱测试 | Spectral test

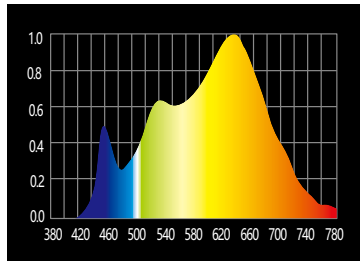

3200K

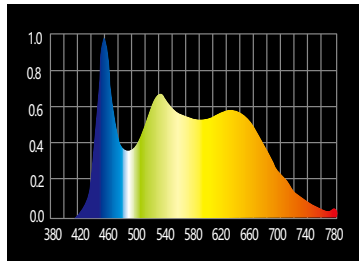

5600K

灯光参数 | Light Parameters

PDL-9-1400RGB	1M	3M	6M
3200K	40020Lux	7050Lux	2300Lux
5600K	41100Lux	7200Lux	2420Lux

详情参数 | Product Introduction

市电输入 MAINS INPUT	调光 DIMMING	光色输出 CASE	工作温度 WORK TEMPERATURE	色差 COLOR DIFFERENCE	重量 WEIGHT	显色性 COLOR RENDERING	标准配置 STANDARD CONFIGURATION	可选配件 OPTIONAL ACCESSORIES
1400W AC:100-240V	0-100%	HSI 360° 1600-20000K	-10 ~ 50℃	± 100K	38KG	TLCI > 95 CRI > 95	太空灯*1 电源线*1 吊绳*1	蛋壳罩*1 控制台*1 航空箱*1
8种控制模式 8 CONTROL MODES					风扇 FAN			
色温模式/色温模式/色坐标模式/特别色温模式/四基色模式/预置色模式/效果模式/色卡模式 CCT / HSI / XY / CCT-S / RGBW / SET-C / LEE / EFFECT					灯头温度达到70℃ 时风扇启动,温度越高, 转速越快 When the temperature of the lamp head reaches 70° C, the fan starts, the higher the temperature, the faster the rotational speed			


PDL-12-1800RGB

十二头彩色太空灯 >>

外观小巧便携，精准控光，满足拍摄需求，适用于各种摄影场所及创意拍摄。

TWELVE COLORED SPACE LIGHTS >>

Compact and portable, precise light control, to meet the needs of shooting, suitable for a variety of photography places and creative shooting.

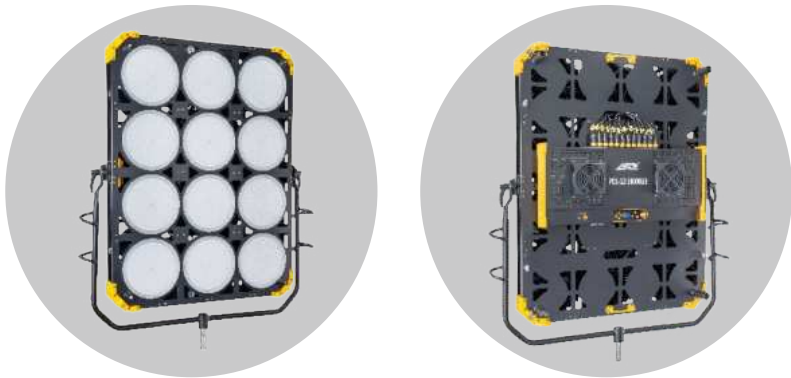

产品特点 | Product Features



坚固铝材/轻便耐用
Strong Material/Light And Durable



组合设计/节省空间
Combination Design
Save Space



静音风扇/智能温控
Quiet Fan/Intelligent
temperature control



无线模式/远程控制
Wireless Mode/Remote Control



简单操作/精准调光
Simple Operation
Precise Dimming



高显指/无频闪
High Finger
No Stroboscopic Light




体积小/重量轻/便携带
Small size / light weight / portable belt




发光角度60°
The luminescence
Angle is 60°


产品结构 | Product mix

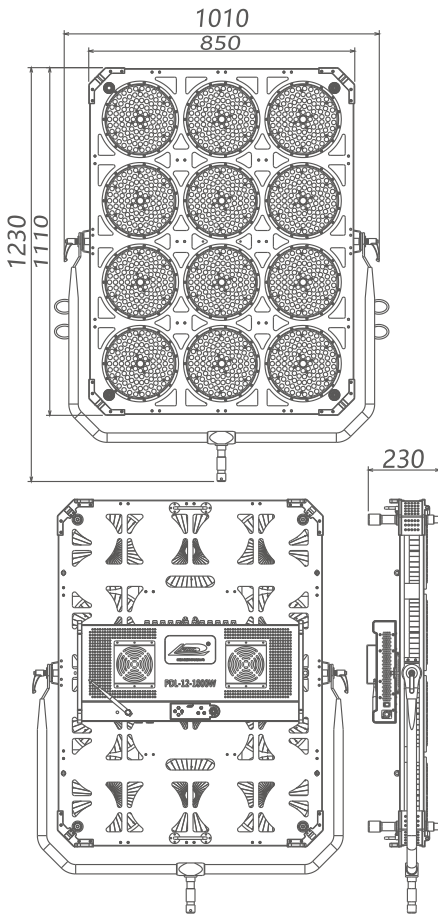

显色指数图 | Color rendering index chart

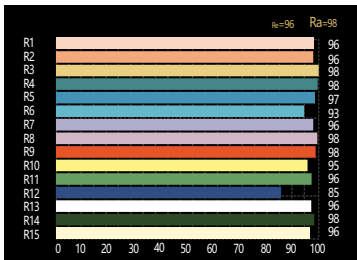


3200K

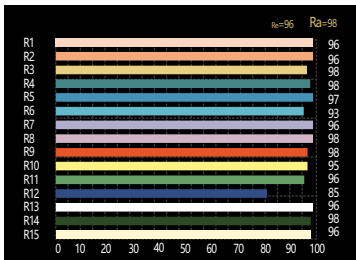


5600K

光谱测试 | Spectral test

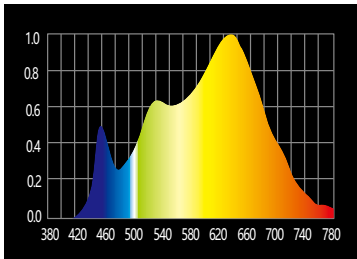

3200K

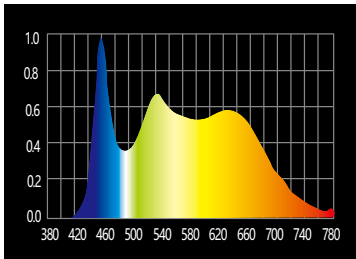

5600K

灯光参数 | Light Parameters

PDL-12-1800RGB	1M	3M	6M
3200K	44900Lux	8910Lux	2610Lux
5600K	46000Lux	9300Lux	2770Lux

详情参数 | Product Introduction

市电输入 MAINS INPUT	调光 DIMMING	光色输出 CASE	工作温度 WORK TEMPERATURE	色差 COLOR DIFFERENCE	重量 WEIGHT	显色性 COLOR RENDERING	标准配置 STANDARD CONFIGURATION	可选配件 OPTIONAL ACCESSORIES
1800W AC100-240V	0-100%	HSI 360° 1600-20000K	-10 ~ 50℃	± 100K	49.5KG	TLCI > 95 CRI > 95	太空灯*1 电源线*1 吊绳*1	蛋壳罩*1 控制台*1 航空箱*1
8种控制模式 8 CONTROL MODES					风扇 FAN			
色温模式/色调模式/色坐标模式/特别色温模式/四基色模式/预置色模式/效果模式/色卡模式 CCT / HSI / XY / CCT-S / RGBW / SET-C / LEE / EFFECT					灯头温度达到70℃ 时风扇启动,温度越高, 转速越快 When the temperature of the lamp head reaches 70° C, the fan starts, the higher the temperature, the faster the rotational speed			

PDL-1-150W

单头双色太空灯 >>

外观小巧便携，精准控光，满足拍摄需求，适用于各种摄影场所及创意拍摄。

SINGLE-HEADED TWO-COLOR SPACE LIGHT >>

Compact and portable appearance, precise light control, meeting shooting needs, Suitable for all kinds of photography places and creative shooting.



产品特点 | Product Features



坚固铝材/轻便耐用
Strong Material/Light And Durable



组合设计/节省空间
Combination Design
Save Space



静音风扇/超强散热
Quiet Fan/Super Heat
Dissipation



无线模式/远程控制
Wireless Mode/Remote Control



简单操作/精准调光
Simple Operation/Precise Dimming



高显指/无频闪
High CRI
No Stroboscopic Light



体积小/重量轻/便携带
Small size / light weight / portable



电池供电/轻便外拍/
超长续航/智能供电
Battery powered / portable outdoor shooting/
Super long endurance / intelligent power supply




发光角度40℃
The luminescence
Angle is 40℃


产品附件 | Product accessories



SF034 灯笼罩
Lantern shroud



SF033 顶灯浅口蛋格罩
Overhead light shallow egg lattice cover

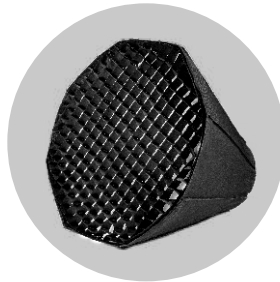

SF030 深口蛋格罩
Deep-mouthed egg lattice cover



SF030 深口蛋格罩接口
Deep-mouth egg crate cover interface



SF034 灯笼罩布包
Lantern cover cloth bag



SF029 灯体包
Lamp body package



SF028 电源线
Power cord



SF002 5M信号线
5m signal line

灯光参数 | Light Parameters

距离/DISTANCE	1M	3M	6M	9M
光照度(LUX)	20000	2300	700	350

详情参数 | Product Introduction

型号 MODEL	市电输入 MAINS INPUT	色温 COLOR TEMPERATURE	调光范围 DIMMING	工作环境温度 WORK TEMPERATURE	颜色 COLOR	地址码 ADDRESS CODE	频道 CHANNEL	标准配置 STANDARD CONFIGURATION	可选配件 OPTIONAL ACCESSORIES
PDL-1-150W	100 ~ 240V 功率:200W	2600-6000K	0-100%	-10 ~ 50℃	无	512*8	DMX512协议 (2.4G外置天线)	单头太空灯X1 5米电源线X1 便携包X1	深口蛋格罩x1 灯笼罩x1 顶灯蛋格罩x1 信号线x1 512控制器x1
电池输入 BATTERY INPUT	电池续航时间 BATTERY LIFE	风扇 FAN	尺寸 SIZE		重量 WEIGHT		8种控制模式 8 CONTROL MODES		显色性 COLOR RENDERING
14.8V/10AH 功率:100W 兼容D-TAP 插头直流供电	满功率使用约 90分钟, 电池 容量越大续航 时间越长	灯头温度达到 55℃ 时风扇 启动,温度越高, 转速越快	430*340*104mm (灯 不含电池) 500*370*100mm (单头灯便携包) φ 300*660mm (灯罩便携包)		3.6kg (灯 不含电池) 0.55kg (单头灯便携包) 4.5kg (一套标配灯总重,含配件便携包) 2.3kg (灯罩便携包)		色温模式/色调模式/色坐标模式/ 特别色温模式/四基色模式/预置色模式 /效果模式/色卡模式		TLCI ≥ 95 CRI ≥ 95

两头双色太空灯 >>

外观小巧便携，精准控光，满足拍摄需求，适用于各种摄影场所及创意拍摄。

TWO-TONE SPACE LIGHTS AT BOTH ENDS >>

Compact and portable, precise light control, to meet the needs of shooting, suitable for a variety of photography places and creative shooting.



PDL-E2-400D

电池款

- 电源输入AC100-240V
- 电池输入DC14.8V/10AH*2个V口电池
兼容D-TAP插头直流供电

Battery

- Power input AC100-240V
- Battery input DC14.8V/10AH *2 V-mount batteries,
compatible with D-TAP plug DC power supply



PDL-2-400D

常规款

- 电源输入AC100-240V
无电池供电

Regular

- Power input AC100-240V
Battery-free

产品特点 | Product Features



坚固铝材/轻便耐用
Strong Material/Light And Durable



组合设计/节省空间
Combination Design
Save Space



静音风扇/智能温控
Quiet Fan/Intelligent
temperature control



无线模式/远程控制
Wireless Mode/Remote Control



简单操作/精准调光
Simple Operation/Precise Dimming



高显指/无频闪
High CRI
No Stroboscopic Light



体积小/重量轻/携带带
Small size / light weight / portable belt






电池供电/轻便外拍/
超长续航/智能供电




发光角度40°C
The luminescence
Angle is 40°C


产品结构 | Product mix

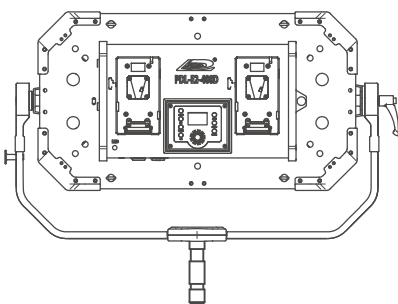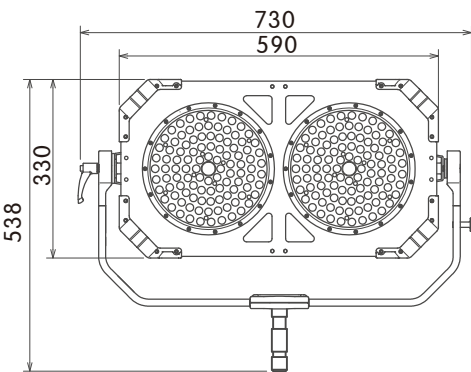

显色指数图 | Color rendering index chart

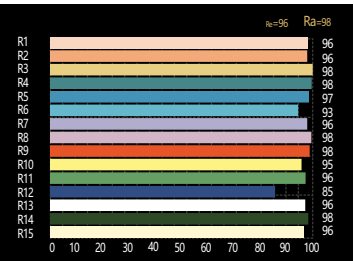


3200K

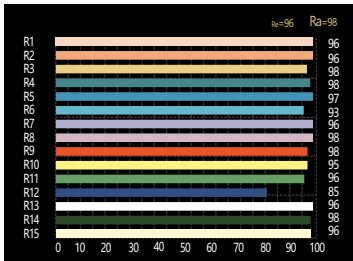


5600K

光谱测试 | Spectral test

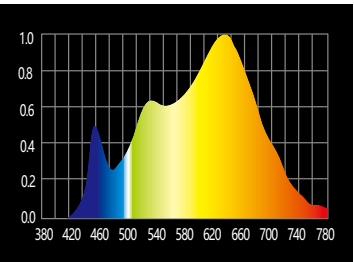

3200K

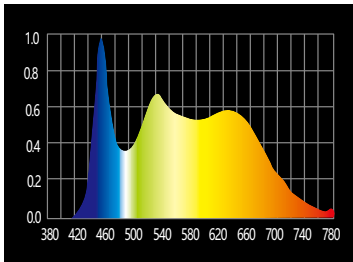

5600K

灯光参数 | Light Parameters

PDL-2-400D	1M	3M	6M
3200K	37200Lux	3950Lux	1168Lux
5600K	39300Lux	4150Lux	1380Lux

详情参数 | Product Introduction

型号 MODEL	市电输入 MAINS INPUT	色温 COLOR TEMPERATURE	调光范围 DIMMING	工作环境温度 WORK TEMPERATURE	颜色 COLOR	地址码 ADDRESS CODE	频道 CHANNEL	标准配置 STANDARD CONFIGURATION	可选配件 OPTIONAL ACCESSORIES
PDL-2-400D	100 ~ 240V 功率:400W	2600-6000K	0-100%	-10 ~ 50°C	无	512*8	DMX512协议 (2.4G外置天线)	太空灯*1 电源线*1	信号线*1 遥控器*1 控制台*1 航空箱*1
电池输入 BATTERY INPUT	电池续航时间 BATTERY LIFE	风扇 FAN	尺寸 SIZE		重量 WEIGHT		2种控制模式 2 CONTROL MODES		显色性 COLOR RENDERING
14.8V/10AH*2 功率:240W 兼容D-TAP 插头直流供电	满功率使用约 90分钟, 电池 容量越大续航 时间越长	灯头温度达到 50°C 时风扇 启动, 温度越高, 转速越快	730*538*196mm (裸灯) L750*W222*H570mm (外纸箱)		11kg (裸灯) 15.1kg (一套标配灯 总重, 含包装)		色温模式/效果模式		TLCI ≥ 95 CRI ≥ 95

PDL-3-600D

三头双色太空灯 >>

外观小巧便携，精准控光，满足拍摄需求，适用于各种摄影场所及创意拍摄。

THREE-HEADED TWO-TONE SPACE LIGHT >>

Compact and portable, precise light control, to meet the needs of shooting, suitable for a variety of photography places and creative shooting.



产品特点 | Product Features



坚固铝材/轻便耐用
Strong Material/Light And Durable



组合设计/节省空间
Combination Design
Save Space



静音风扇/智能温控
Quiet Fan/Intelligent
temperature control



无线模式/远程控制
Wireless Mode/Remote Control



简单操作/精准调光
Simple Operation
Precise Dimming



高显指/无频闪
High Finger
No Stroboscopic Light




体积小/重量轻/便携带
Small size / light weight / portable belt




发光角度40℃
The luminescence
Angle is 40℃


产品结构 | Product mix

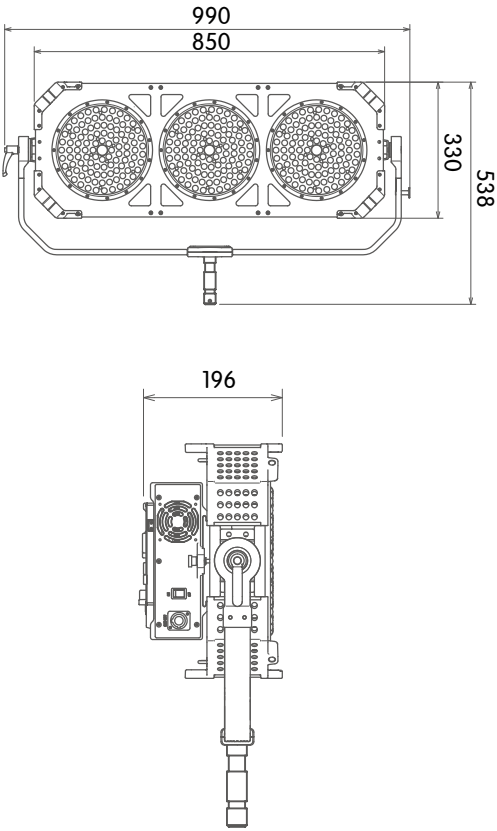

显色指数图 | Color rendering index chart

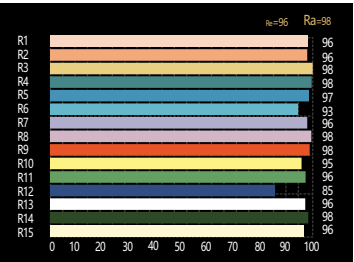


3200K

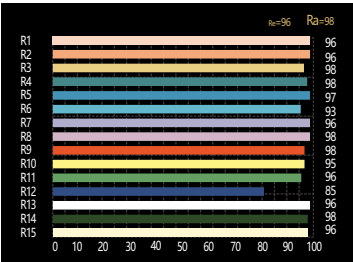


5600K

光谱测试 | Spectral test

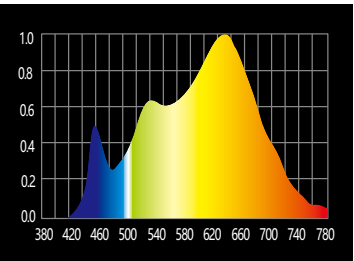

3200K

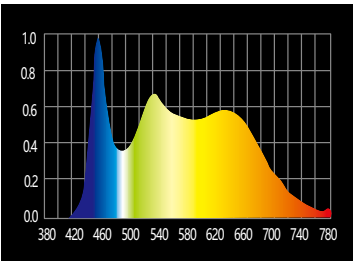

5600K

灯光参数 | Light Parameters

PDL-3-600D	1M	3M	6M
3200K	53200Lux	6210Lux	2180Lux
5600K	55600Lux	6450Lux	2320Lux

详情参数 | Product Introduction

市电输入 MAINS INPUT	调光 DIMMING	光色输出 CASE	工作温度 WORK TEMPERATURE	色差 COLOR DIFFERENCE	重量 WEIGHT	显色性 COLOR RENDERING	标准配置 STANDARD CONFIGURATION	可选配件 OPTIONAL ACCESSORIES
550W AC:100-240V	0-100%	2600-6000K	-10 - 50℃	± 100K	14.2KG	TLCI > 95 CRI > 95	太空灯*1 电源线*1	信号线*1 蛋壳罩*1 控制台*1 航空箱*1
2种控制模式 2 CONTROL MODES						风扇 FAN		
色温模式/效果模式 CCT / EFFECT						灯头温度达到50℃时风扇启动,温度越高,转速越快 When the temperature of the lamp head reaches 50° C, the fan starts, the higher the temperature, the faster the rotational speed		


PDL-4-750W

四头双色太空灯 >>

外观小巧便携，精准控光，满足拍摄需求，适用于各种摄影场所及创意拍摄。

FOUR-HEADED TWO-TONE SPACE LIGHTS >>

Compact and portable, precise light control, to meet the needs of shooting, suitable for a variety of photography places and creative shooting.

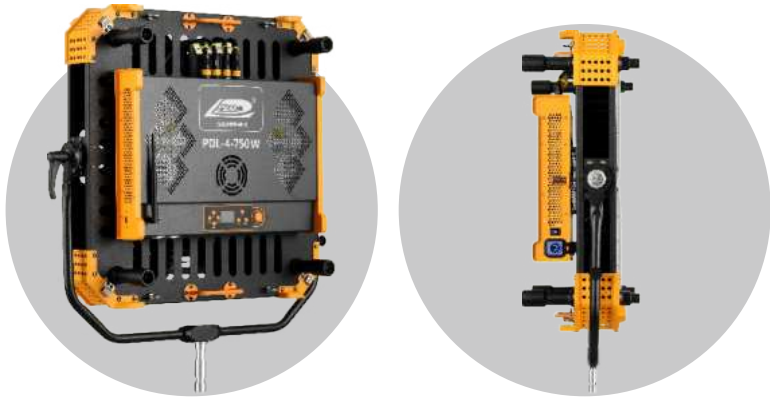

产品特点 | Product Features



坚固铝材/轻便耐用
Strong Material/Light And Durable



组合设计/节省空间
Combination Design
Save Space



静音风扇/超强散热
Quiet Fan/Super Heat
Dissipation



无线模式/远程控制
Wireless Mode/Remote Control



简单操作/精准调光
Simple Operation/Precise Dimming





高显指/无频闪
High Finger
No Stroboscopic Light




发光角度40°
The luminescence
Angle is 40°


产品结构 | Product mix

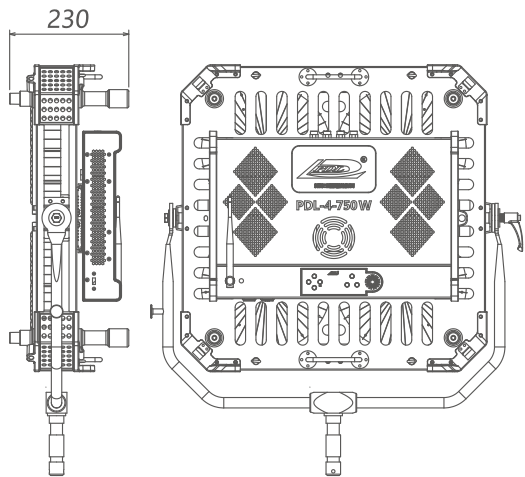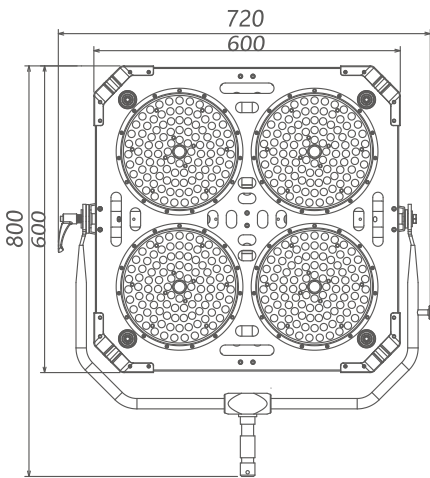

显色指数图 | Color rendering index chart

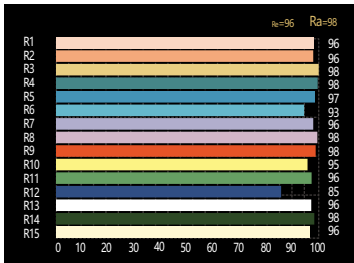


3200K

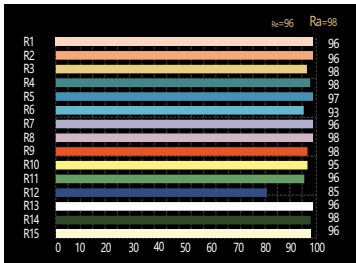


5600K

光谱测试 | Spectral test

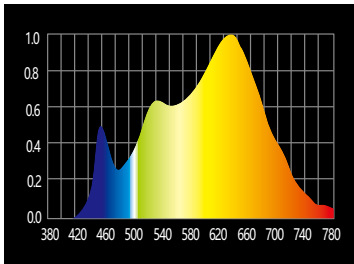

3200K

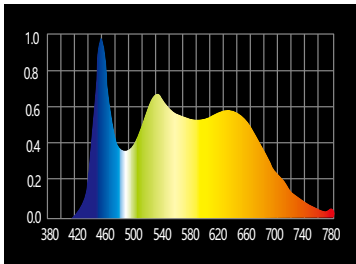

5600K

灯光参数 | Light Parameters

PDL-4-750W	3M	6M	9M
3200K	6600Lux	2040Lux	1080Lux
5600K	7560Lux	2160Lux	1140Lux

详情参数 | Product Introduction

型号 Model	电源输入 POWER INPUT RANGE	色温 COLOR TEMPERATURE	调光 DIMMING	工作温度 WORK TEMPERATURE	色差 COLOR DIFFERENCE	重量 WEIGHT	显色性 COLOR RENDERING	航空箱尺寸(cm) AIR BOX SIZE	航空箱重量 WEIGHT OF AIR CASE
PDL-4-750W	100-240V	2600-6000K	0-100%	-10~60℃	±100K	21KG	TLCI > 95 CRI > 95	77*84*29	18KG


PDL-6-900W

六头双色太空灯 >>

外观小巧便携，精准控光，满足拍摄需求，适用于各种摄影场所及创意拍摄。

SIX-HEADED TWO-COLOR SPACE LIGHTS >>

Compact and portable, precise light control, to meet the needs of shooting, suitable for a variety of photography places and creative shooting.

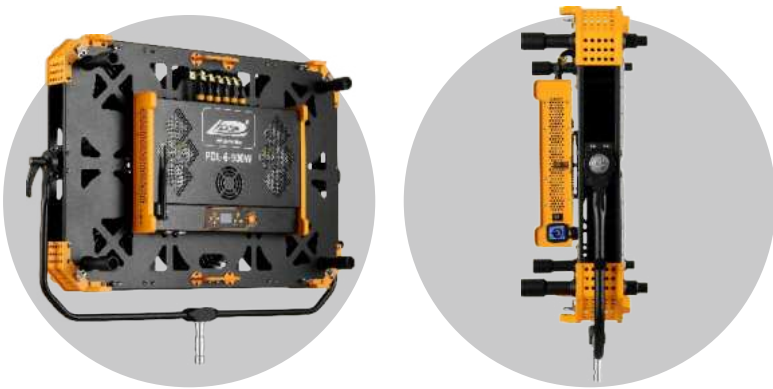

产品特点 | Product Features



坚固铝材/轻便耐用
Strong Material/Light And Durable



组合设计/节省空间
Combination Design
Save Space



静音风扇/超强散热
Quiet Fan/Super Heat
Dissipation



无线模式/远程控制
Wireless Mode/Remote Control



简单操作/精准调光
Simple Operation/Precise Dimming




高显指/无频闪
High Finger
No Stroboscopic Light




发光角度40℃
The luminescence
Angle is 40℃


产品结构 | Product mix

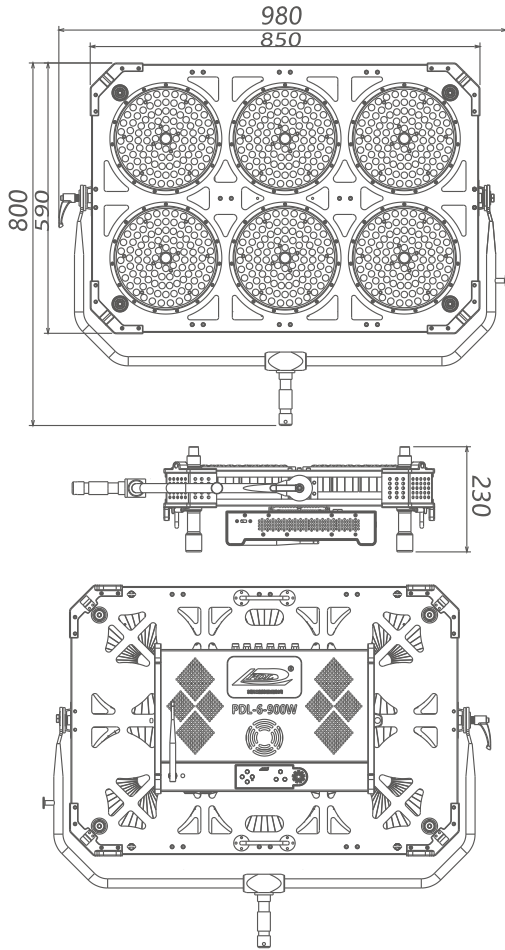

显色指数图 | Color rendering index chart

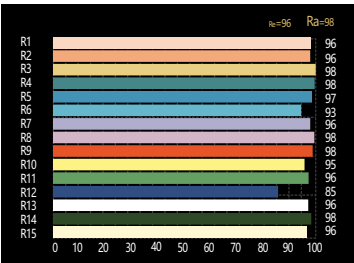


3200K

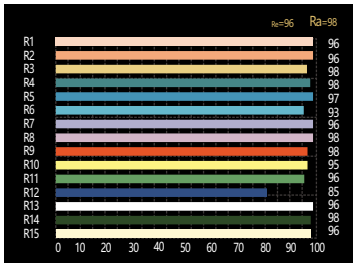


5600K

光谱测试 | Spectral test

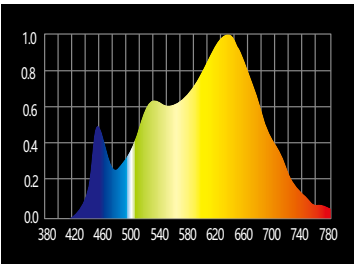

3200K

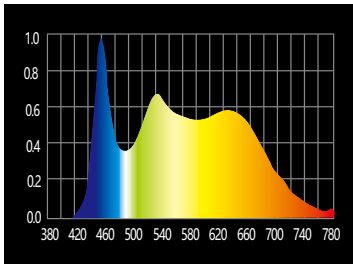

5600K

灯光参数 | Light Parameters

PDL-6-900W	3M	6M	9M
3200K	9000Lux	3060Lux	1680Lux
5600K	11538Lux	3320Lux	1860Lux

详情参数 | Product Introduction

型号 Model	电源输入 POWER INPUT RANGE	色温 COLOR TEMPERATURE	调光 DIMMING	工作温度 WORK TEMPERATURE	色差 COLOR DIFFERENCE	重量 WEIGHT	显色性 COLOR RENDERING	航空箱尺寸(cm) AIR BOX SIZE	航空箱重量 WEIGHT OF AIR CASE
PDL-6-900W	100-240V	2600-6000K	0-100%	-10~60℃	±100K	26KG	TLCI > 95 CRI > 95	102*30*85	19.2KG

PDL-6-900W

六头双色太空灯 >>

外观小巧便携，精准控光，满足拍摄需求，适用于各种摄影场所及创意拍摄。

SIX-HEADED TWO-COLOR SPACE LIGHTS >>

Compact and portable, precise light control, to meet the needs of shooting, suitable for a variety of photography places and creative shooting.



产品特点 | Product Features



坚固铝材/轻便耐用
Strong Material/Light And Durable



组合设计/节省空间
Combination Design
Save Space



静音风扇/超强散热
Quiet Fan/Super Heat
Dissipation



无线模式/远程控制
Wireless Mode/Remote Control



简单操作/精准调光
Simple Operation/Precise Dimming




高显指/无频闪
High Finger
No Stroboscopic Light




发光角度40℃
The luminescence
Angle is 40℃


产品结构 | Product mix

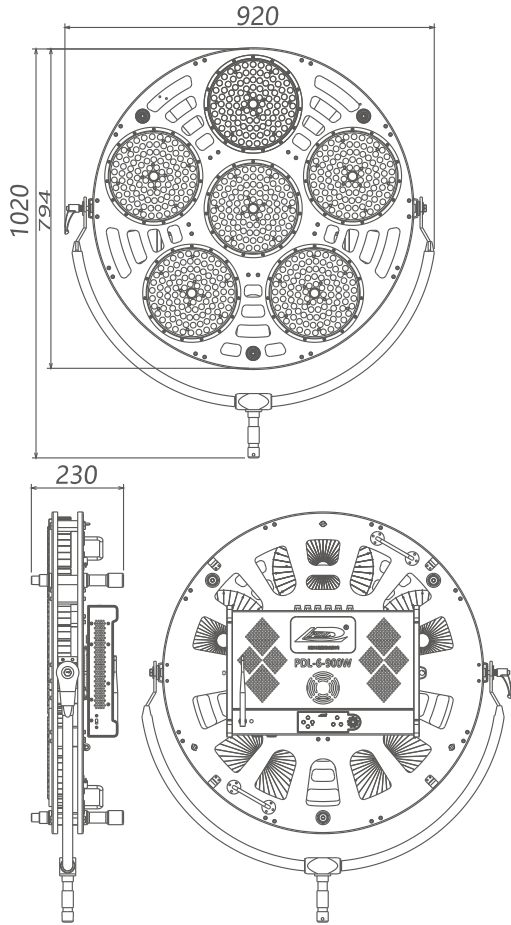

显色指数图 | Color rendering index chart

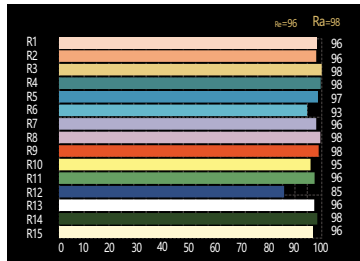


3200K

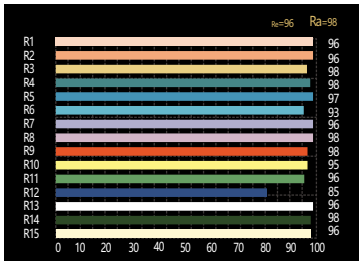


5600K

光谱测试 | Spectral test

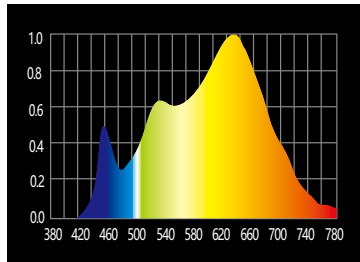

3200K

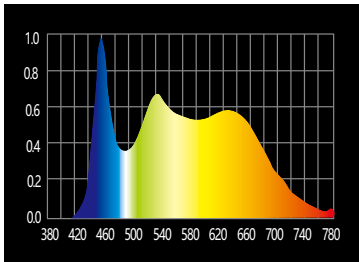

5600K

灯光参数 | Light Parameters

PDL-6-900W	3M	6M	9M
3200K	9000Lux	3060Lux	1680Lux
5600K	11538Lux	3320Lux	1860Lux

详情参数 | Product Introduction

型号 Model	电源输入 POWER INPUT RANGE	色温 COLOR TEMPERATURE	调光 DIMMING	工作温度 WORK TEMPERATURE	色差 COLOR DIFFERENCE	重量 WEIGHT	显色性 COLOR RENDERING	航空箱尺寸(cm) AIR BOX SIZE	航空箱重量 WEIGHT OF AIR CASE
PDL-6-900W	100-240V	2600-6000K	0-100%	-10~60℃	±100K	26KG	TLCI > 95 CRI > 95	95*95*32	22.1KG

PDL-8-1300W

八头双色太空灯 >>

外观小巧便携，精准控光，满足拍摄需求，适用于各种摄影场所及创意拍摄。

EIGHT TWO-HEADED TWO-COLOR SPACE LIGHTS >>

Compact and portable, precise light control, to meet the needs of shooting, suitable for a variety of photography places and creative shooting.



产品特点 | Product Features



坚固铝材/轻便耐用
Strong Material/Light And Durable



组合设计/节省空间
Combination Design
Save Space



静音风扇/超强散热
Quiet Fan/Super Heat
Dissipation



无线模式/远程控制
Wireless Mode/Remote Control



简单操作/精准调光
Simple Operation/Precise Dimming




高显指/无频闪
High CRI
No Stroboscopic Light




八头灯/聚光散光
Eight Headlights
Concentrated Astigmatism


产品结构 | Product mix

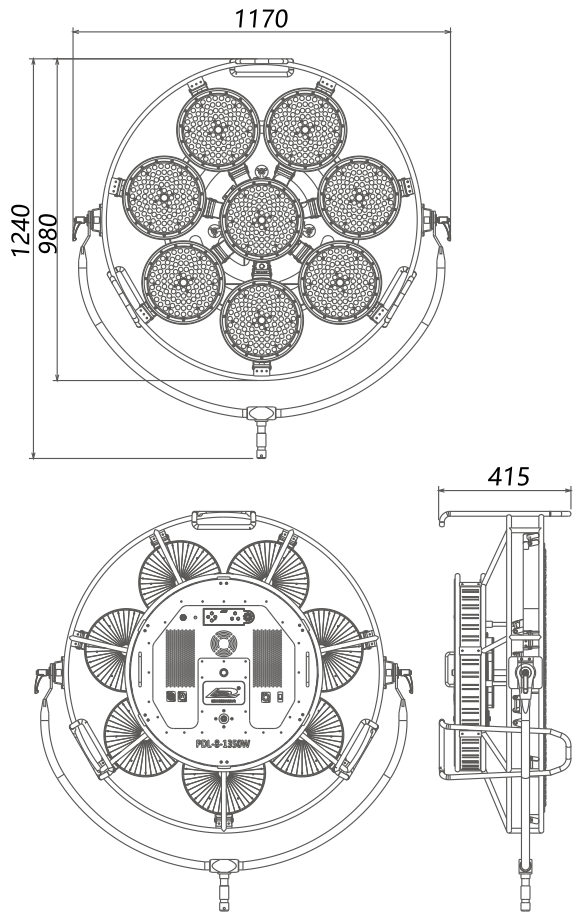

显色指数图 | Color rendering index chart

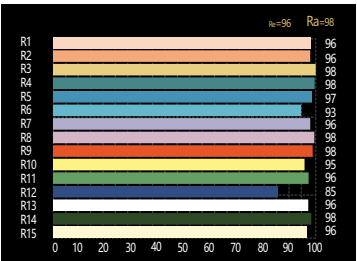


3200K

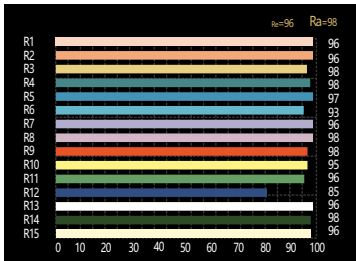


5600K

光谱测试 | Spectral test

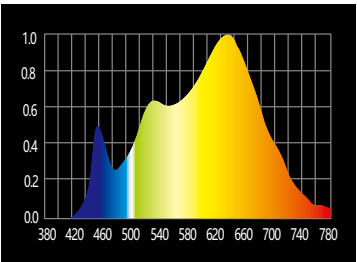

3200K

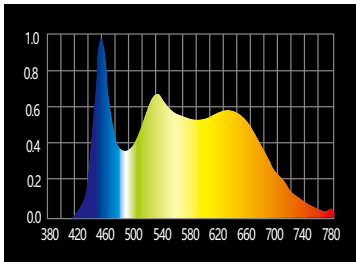

5600K

灯光参数 | Light Parameters

PDL-8-1300W	3M	6M	9M
3200K	12500Lux	3640Lux	1860Lux
5600K	14200Lux	4000Lux	2000Lux

详情参数 | Product Introduction

型号 Model	电源输入 POWER INPUT RANGE	色温 COLOR TEMPERATURE	调光 DIMMING	工作温度 WORK TEMPERATURE	色差 COLOR DIFFERENCE	重量 WEIGHT	显色性 COLOR RENDERING	航空箱尺寸(cm) AIR BOX SIZE	航空箱重量 WEIGHT OF AIR CASE
PDL-8-1300W	100-240V	2600-6000K	0-100%	-10~60℃	±100K	45KG	TLCI > 95 CRI > 95	113*113*55	35KG

PDL-9-1400W

九头双色太空灯 >>

外观小巧便携，精准控光，满足拍摄需求，适用于各种摄影场所及创意拍摄。

NINE-HEADED TWO-COLOR SPACE LIGHTS >>

Compact and portable, precise light control, to meet the needs of shooting, suitable for a variety of photography places and creative shooting.



产品特点 | Product Features



坚固铝材/轻便耐用
Strong Material/Light And Durable



组合设计/节省空间
Combination Design
Save Space



静音风扇/超强散热
Quiet Fan/Super Heat
Dissipation



无线模式/远程控制
Wireless Mode/Remote Control



简单操作/精准调光
Simple Operation/Precise Dimming




高显指/无频闪
High Finger
No Stroboscopic Light




八头灯/聚光散光
Eight Headlights
Concentrated Astigmatism


产品结构 | Product mix

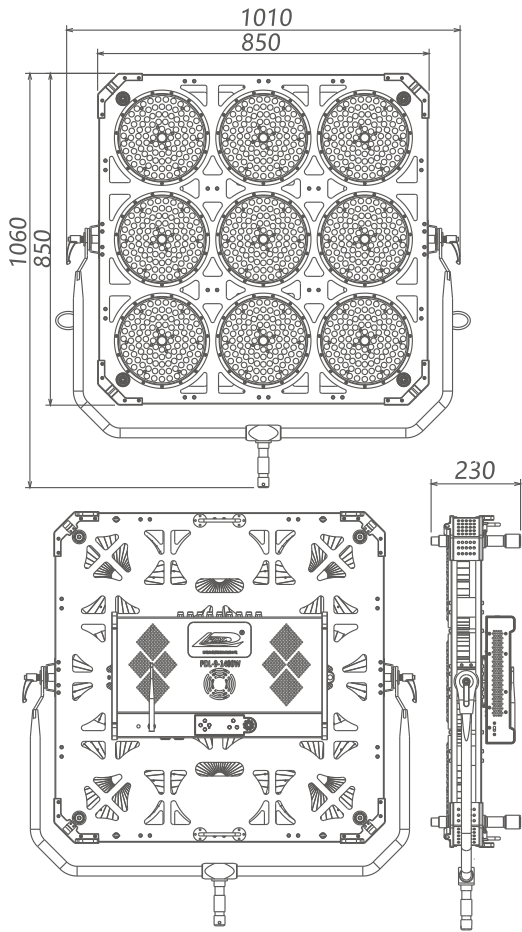

显色指数图 | Color rendering index chart

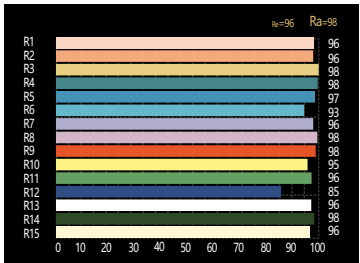


3200K

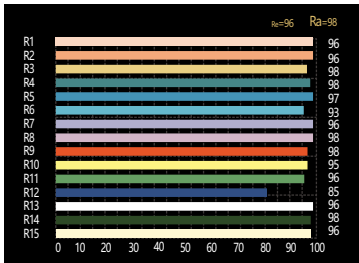


5600K

光谱测试 | Spectral test

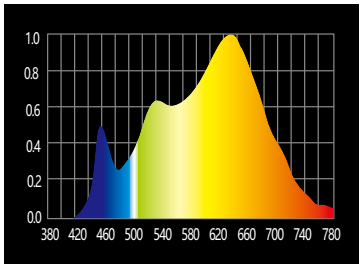

3200K

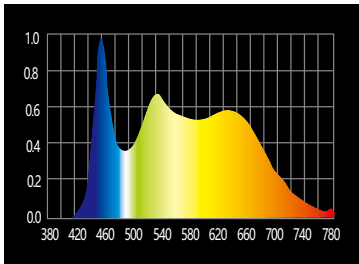

5600K

灯光参数 | Light Parameters

PDL-9-1400W	3M	6M	9M
3200K	13500Lux	3940Lux	2090Lux
5600K	15300Lux	4540Lux	2350Lux

详情参数 | Product Introduction

型号 Model	电源输入 POWER INPUT RANGE	色温 COLOR TEMPERATURE	调光 DIMMING	工作温度 WORK TEMPERATURE	色差 COLOR DIFFERENCE	重量 WEIGHT	显色性 COLOR RENDERING	航空箱尺寸(cm) AIR BOX SIZE	航空箱重量 WEIGHT OF AIR CASE
PDL-9-1400W	100-240V	2600-6000K	0-100%	-10 ~ 60℃	± 100K	37.6KG	TLCI > 95 CRI > 95	102*111*32	25.7KG

PDL-12-1800W

十二头双色太空灯 >>

外观小巧便携，精准控光，满足拍摄需求，适用于各种摄影场所及创意拍摄。

TWELVE-HEADED TWO-TONE SPACE LIGHTS >>

Compact and portable, precise light control, to meet the needs of shooting, suitable for a variety of photography places and creative shooting.



产品特点 | Product Features



坚固铝材/轻便耐用
Strong Material/Light And Durable



组合设计/节省空间
Combination Design
Save Space



静音风扇/超强散热
Quiet Fan/Super Heat
Dissipation



无线模式/远程控制
Wireless Mode/Remote Control



简单操作/精准调光
Simple Operation/Precise Dimming




高显指/无频闪
High Finger
No Stroboscopic Light




八头灯/聚光散光
Eight Headlights
Concentrated Astigmatism


产品结构 | Product mix

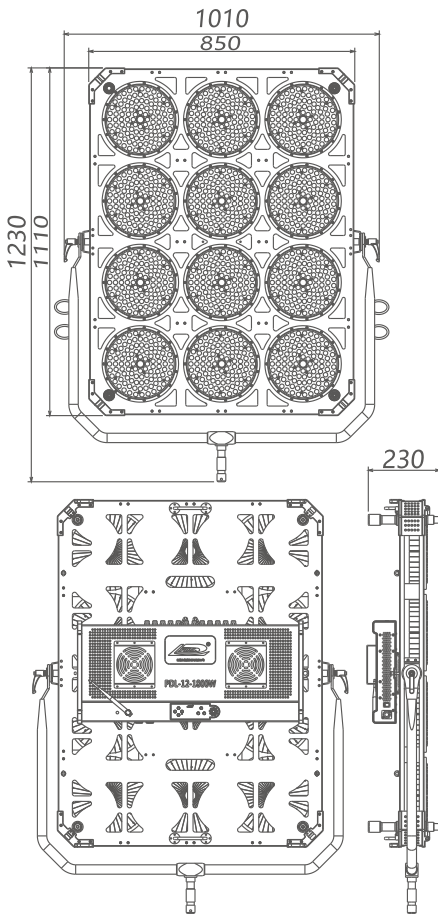

显色指数图 | Color rendering index chart

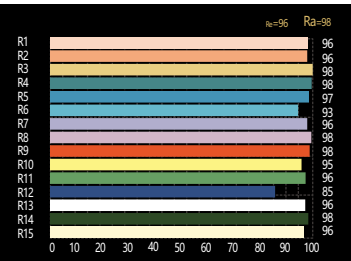


3200K




5600K

光谱测试 | Spectral test

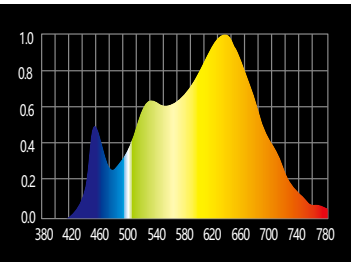

3200K



5600K

灯光参数 | Light Parameters

PDL-12-1800W	3M	6M	9M
3200K	21120Lux	7850Lux	5100Lux
5600K	23500Lux	8320Lux	5870Lux

详情参数 | Product Introduction

型号 Model	电源输入 POWER INPUT RANGE	色温 COLOR TEMPERATURE	调光 DIMMING	工作温度 WORK TEMPERATURE	色差 COLOR DIFFERENCE	重量 WEIGHT	显色性 COLOR RENDERING	航空箱尺寸(cm) AIR BOX SIZE	航空箱重量 WEIGHT OF AIR CASE
PDL-12-1800W	100-240V	2600-6000K	0-100%	-10~60℃	±100K	49KG	TLCI > 95 CRI > 95	110*138*29	31.4KG

PDL-CT-512

DMX512灯光控台 >>

控台广泛应用于影棚拍摄、舞台演出、外出拍摄、直播间等场景，体积小，更加便捷的控制灯光。

- 主要特点：
- 超远距离无线调节灯光亮度、色温、颜色等参数；
 - LCD显示屏，屏幕显示与灯光同步，颜色亮度都能显示；
 - 六通道调节，推杆采用全新防撞设计；
 - 八个传输频道，满足多个灯光同时控制与独立控制，防止干扰；
 - 同步性极高，信号传输快，兼无线控制与接线控制；
 - 两节18650大电池，持续最大功耗工作时间高达48小时。

规格参数 | SPECIFICATIONS:

传输 / TRANSMIT	无线传输/DMX信号线传输 Wireless transmission/DMX signal line transmission	
信号接口 / SIGNAL JIE	3芯 5芯	/ 3 cores 5 cores
通道数 / NUMBER OF CHANNELS	512*8域	/ 512*8 domains
域 / REGION	8个域（8个频道）	/ 8 domains (8 channels)
无线距离 / WIRELESS DISTANCE	100M(开阔区域)	/ 100M (open area)
续航 / ENDURANCE	48H（最大功耗工作 / Maximum power consumption）	
充电 / CHARGE	DC 5V 2A	
尺寸 / SIZE	21.4 x 12 x 5.3cm	
重量 / WEIGHT	0.8kg	

DMX512 lighting console >>

The console is widely used in studio shooting, stage performances, outdoor shooting,Live broadcast room and other scenes, small size, more convenient to control lighting.。

- KEY FEATURES:
- Ultra-long-distance wireless adjustment of light brightness, color temperature, color and other parameters;
 - LCD display, the screen display is synchronized with the light, and the color brightness can be displayed;
 - Six-channel adjustment, the push rod adopts a new anti-collision design;
 - Eight transmission channels to meet the simultaneous control and independent control of multiple lights to prevent interference;
 - High synchronization, fast signal transmission, wireless control and wiring control;
 - Two 18650 large batteries, continuous maximum power consumption working time up to 48 hours.



PDL-MK-512

无线发射器 >>

该发射器用于非PDL公司生产的控台；非PDL公司生产的DMX512控台不能无线控制PDL灯光，此时控台连接该发射器，即可实现无线控制。

- 主要特点：
- 一个发射器可以同时控制很多个灯光；
 - 按键切换域（频道）简单便捷。

规格参数 | SPECIFICATIONS:

电源 / POWER SUPPLY	DC 5V 1A	
传输 / TRANSMIT	无线传输	/ Wireless transmission
信号接口 / SIGNAL JIE	3芯	/ 3 cores
域 / REGION	8个域（8个频道）	/ 8 domains (8 channels)
无线距离 / WIRELESS DISTANCE	100M(开阔区域)	/ 100M (open area)
尺寸 / SIZE	29.4 x 4 x 3.2cm	
重量 / WEIGHT	0.15kg	

Wireless transmitter >>

This transmitter is used in consoles that are not manufactured by PDL; The DMX512 console produced by non-PDL companies cannot control PDL lights wirelessly. At this time, the console can be connected to the transmitter to achieve wireless control.

- KEY FEATURES:
- One transmitter can control many lights at the same time;
 - Button to switch the field (channel) is simple and convenient.



太空灯配件 | SPACE LIGHT ACCESSORIES



SF004 天线
World

SF003 钢丝绳
Wire rope

SF001 3M电源线
3m power cord

SF002 5M信号线
5m signal line

航空箱
Contain

应用场景 | Application Scenarios



PDL-S-200D

聚光灯 >>

光效高，光品好，外观小巧便携，可结合保荣卡口配件，精准控光，满足拍摄需求，适用于各种摄影场所及创意拍摄。

SPOTLIGHT >>

It has high light efficiency, good light quality, small and portable appearance, and can be combined with Baorong bayonet accessories to accurately control the light, Meet shooting needs, suitable for all kinds of photography places and creative shooting



产品特点 | Product Features



坚固铝材/轻便耐用
Strong Material/Light And Durable



组合设计/节省空间
Combination Design
Save Space



静音风扇/超强散热
Quiet Fan/Super Heat
Dissipation



无线模式/远程控制
Wireless Mode/Remote Control



简单操作/精准调光
Simple Operation/Precise Dimming



高显指/无频闪
High Finger
No Stroboscopic Light



体积小/重量轻/携带带
Small size / light weight / portable belt



电池供电/轻便外拍/
超长续航/智能供电
Battery powered / portable outdoor shooting/
Super long endurance / intelligent power supply



发光角度40℃
The luminescence
Angle is 40℃

产品附件 | Product accessories




S013 15度反光罩
15-DEGREE REFLECTOR



S012 40度反光罩
40-DEGREE REFLECTOR



SF028 电源线
POWER CORD

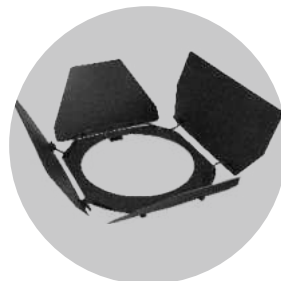


S008 四页遮光板
FOUR-PAGE VISORS



S006 包
PACK



S007 V口电池挂板
V-MOUNT BATTERY HANGING PLATE

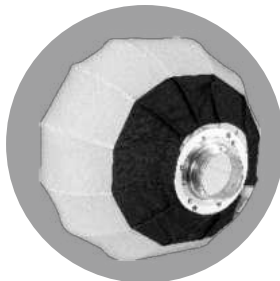

S010 灯笼罩
LANTERN SHROUD



S010 灯笼罩
LANTERN SHROUD

灯光参数 | Light Parameters

距离 DISTANCE	1M	3M	6M	9M
光照度(LUX) 40°反光罩	83700	7200	1900	900
光照度(LUX) 15°反光罩	130000	13000	3000	1400

详情参数 | Product Introduction

型号 MODEL	市电输入 MAINS INPUT	色温 COLOR TEMPERATURE	调光范围 DIMMING	工作环境温度 WORK TEMPERATURE	色差 ADDRESS CODE	地址码 ADDRESS CODE	频道 CHANNEL	显色性 COLOR RENDERING
PDL-S-200D	100 ~ 240V 功率:200W	2600-6000K	0-100%	-10 ~ 50℃	± 100K	512*8	DMX512协议 (2.4G外置天线)	TLCI ≥ 95 CRI ≥ 95
电池输入 BATTERY INPUT	电池续航时间 BATTERY LIFE	风扇 FAN	尺寸 SIZE		重量 WEIGHT		标准配置 STANDARD CONFIGURATION	可选配件 OPTIONAL ACCESSORIES
14.8V/10AH 功率:10W 兼容D-TAP 插头直流供电	满功率使用约 90分钟。电池 容量越大续航 时间越长	灯头温度达到 50℃ 时风扇 启动,温度越高, 转速越快	320*245*165mm (灯头不含灯罩) 460*245*180mm (灯头含标准罩) 490*420*210mm (箱包)		3.6kg (灯头含标准罩) 2.6kg (箱包) 7kg (一套标配灯总重, 含配件箱包)		1) 聚光灯x1 2) 40°反光罩x1 3) 5米电源线x1 4) V口电池挂板x1 5) S200D箱包x1	1) 15°反光罩x1 2) 四叶遮光板x1 3) 灯笼罩x1 4) 蛋壳罩x1 5) 512控制器x1

PDL-S-500D

聚光灯 >>

光效高，光品好，外观小巧便携，可结合保荣卡口配件，精准控光，满足拍摄需求，适用于各种摄影场所及创意拍摄。

SPOTLIGHT >>

It has high light efficiency, good light quality, small and portable appearance, and can be combined with Baorong bayonet accessories to accurately control the light, Meet shooting needs, suitable for all kinds of photography places and creative shooting



产品特点 | Product Features



坚固铝材/轻便耐用
Strong Material/Light And Durable



组合设计/节省空间
Combination Design
Save Space



静音风扇/超强散热
Quiet Fan/Super Heat
Dissipation



无线模式/远程控制
Wireless Mode/Remote Control



简单操作/精准调光
Simple Operation/Precise Dimming



高显指/无频闪
High Finger
No Stroboscopic Light



体积小/重量轻/携带带
Small size / light weight / portable belt



电池供电/轻便外拍/
超长续航/智能供电
Battery powered / portable outdoor shooting/
Super long endurance / intelligent power supply



发光角度40℃
The luminescence
Angle is 40℃

产品附件 | Product accessories




S013 15度反光罩
15-degree reflector



S012 40度反光罩
40-degree reflector



SF028 电源线
Power cord




S008 四页遮光板
Four-page visors



S005 包
Pack



S004 5米DC连接线
5m dc cable



S010 灯笼罩
Lantern shroud



S001 固定夹
Retaining clips

灯光参数 | Light Parameters

距离 DISTANCE	1M	3M	6M	9M
光照度(LUX) 40°反光罩	174000	14200	3600	1650
光照度(LUX) 15°反光罩	200000	22300	5500	2600

详情参数 | Product Introduction

型号 MODEL	市电输入 MAINS INPUT	色温 COLOR TEMPERATURE	调光范围 DIMMING	工作环境温度 WORK TEMPERATURE	色差 ADDRESS CODE	地址码 ADDRESS CODE	频道 CHANNEL	显色性 COLOR RENDERING
PDL-S-500D	100 ~ 240V 功率:500W	2600-6000K	0-100%	-10 ~ 50℃	± 100K	512*8	DMX512协议 (2.4G外置天线)	TLCI ≥ 95 CRI ≥ 95
电池输入 BATTERY INPUT	电池续航时间 BATTERY LIFE	风扇 FAN	尺寸 SIZE	重量 WEIGHT	标准配置 STANDARD CONFIGURATION	可选配件 OPTIONAL ACCESSORIES		
14.8V/10AH*2 功率:240W 兼容D-TAP 插头直流供电	满功率使用约 90分钟。电池 容量越大续航 时间越长	TEMP1 控制盒温度达到 40℃ 风扇自动/温度越高/转速越快 TEMP2 灯头温度达到 50℃ 风扇自动/温度越高/转速越快	320*245*190 (灯头 不含灯罩) 460*245*190 (灯头 含标准罩) 357*230*180 (控制盒) 620*520*210 (箱包)	3.85kg (灯头 含标准罩) 2.85kg (控制盒) 3.65kg (箱包) 11.5kg (一套标配灯总重, 含配件箱包)	1) 聚光灯x1 2) 40°反光罩x1 3) 5米电源线x1 4) 5米DC连接线*1 5) S500D箱包x1 6) 电源盒*1 7) 固定夹*1	1) 15°反光罩x1 4) 蛋壳罩x1 2) 四叶遮光板x1 5) 灯笼罩x1 3) 信号线x1 6) 512控制器x1		

PDL-S-2000D
PDL-S-1500D

聚光灯 >>

光效高，光品好，贴片式集成光源；
外观小巧便携，精准控光，满足拍摄需求，适用于各种
摄影场所及创意拍摄。

SPOTLIGHT >>

High light efficiency, good light quality, SMD integrated light source;
The appearance is small and portable, and the light is precisely controlled,
which meets the needs of shooting and is suitable for all kinds of applications
Photography locations and creative shooting.



- 

坚固铝材/轻便耐用
Strong Material/Light And Durable
- 

组合设计/节省空间
Combination Design
Save Space
- 

静音风扇/超强散热
Quiet Fan/Super Heat
Dissipation
- 

无线模式/远程控制
Wireless Mode/Remote Control
- 

简单操作/精准调光
Simple OperationPrecise Dimming
- 


高显指/无频闪
High Finger
No Stroboscopic Light
- 

体积小/重量轻/携带带
Small size / light weight / portable belt
- 

集成式贴片灯珠
Integrated Smd Lamp Beads


产品附件 | Product accessories

- 

S014 35度反光罩
35-degree reflector
- 

S008 四页遮光板
Four-page visors
- 

S015 10米DC连接线
10m dc cable
- 

S017 电源线
Power cord
- 

S016 航空箱包装
Flight case packing

灯光参数 | Light Parameters

型号 /MODEL	PDL-S-1500D		PDL-S-2000D	
市电输入 /MAINS INPUT	100-240V 50/60HZ 1500W		100-240V 50/60HZ 2000W	
色温 /COLOR TEMPERATURE	2600-6000K		5600K	
色差 /ADDRESS CODE	± 100K			
调光范围 /DIMMING	0-100%			
显色性 /COLOR RENDERING	TLCI ≥ 95 CRI ≥ 95			
频道 /CHANNEL	DMX512协议 2.4G外置天线 /DMX512 protocol 2.4G external antenna			
地址码 /ADDRESS CODE	512*8			
工作环境温度 /WORK TEMPERATURE	-10 ~ 50℃			
尺寸 /SIZE	415*590*400mm（灯头 含标准罩 /LAMPHOLDER WITH STANDARD COVER） 400*300*125mm（电源盒 /POWER BOX） 780*510*490mm（航空箱 /AIRBOX）			
重量 /WEIGHT	13.8KG （灯头 含标准罩 /LAMPHOLDER WITH STANDARD COVER） 9.8KG （电源盒 /POWER BOX） 49KG （航空箱 /AIRBOX）			
风扇 /FAN	T1 电源盒温度达到 40℃ 风扇启动,温度越高,转速越快 /The T1 power box reaches 40° C and the fan starts, the higher the temperature, the faster the speed T2 灯头温度达到 50℃ 风扇启动,温度越高,转速越快 /The T2 head reaches a temperature of 50° C and the fan is activated, the higher the temperature, the faster the rotation			
光照度 /ILLUMINANCE	3m- 36500LX 6m- 8200LX	9m- 4400LX 12m- 2500LX	3m- 56000LX 6m- 13200LX	9m- 7200LX 12m- 4200LX
标准配置 /STANDARD CONFIGURATION	聚光灯*1/ 电源盒*1/ 反光罩*1/ 10米DC连接线*1/ 3米电源线*1/ 航空箱*1 SPOTLIGHT*1/ POWER BOX*1/ REFLECTOR*1/ 10M DC CABLE*1/ 3M POWER CABLE*1 / FLIGHT CASE*1			
可选配件 /OPTIONAL ACCESSORIES	四页遮光板*1/ 信号线*1 / DMX512控台*1 FOUR-PAGE LIGHT SHIELD*1 / SIGNAL CABLE*1 / DMX512 CONSOLE*1			

PDL-EPL-350RGB

平板灯 >>

能够提供高亮度和柔和的光效，智能调速风扇，精准控光，适用于各种摄影场所及创意拍摄。

FLAT LIGHTS >>

It can provide high brightness and soft light effect, intelligent speed control fan, Precise light control, suitable for a variety of photography locations and creative shooting.



产品特点 | Product Features



坚固铝材/轻便耐用
Strong Material/Light And Durable



组合设计/节省空间
Combination Design
Save Space



静音风扇/智能温控
Quiet Fan/Intelligent
temperature control



无线模式/远程控制
Wireless Mode/Remote Control



简单操作/精准调光
Simple Operation
Precise Dimming



高显指/无频闪
High Finger
No Stroboscopic Light




体积小/重量轻/便携带
Small size / light weight / portable belt




电池供电/轻便外拍/
超长续航/智能供电
Battery powered / portable outdoor shooting/
Super long endurance / intelligent power supply


产品结构 | Product mix

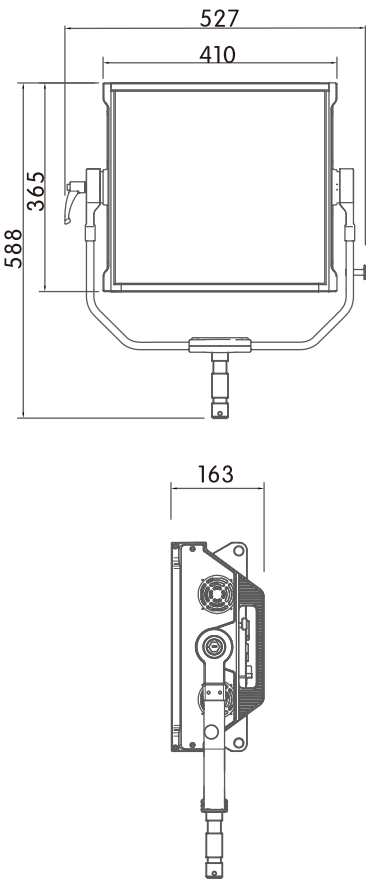

显色指数图 | Color rendering index chart

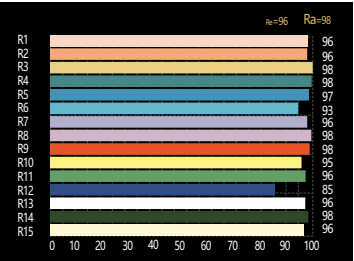


3200K

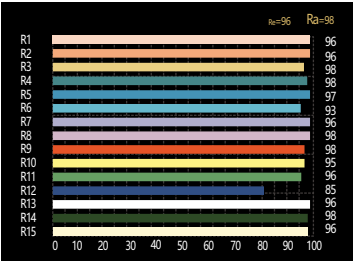


5600K

光谱测试 | Spectral test

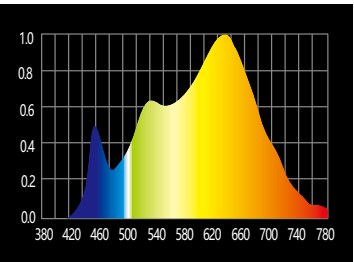

3200K

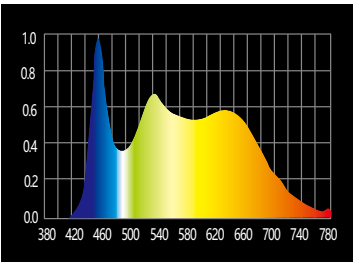

5600K

灯光参数 | Light Parameters

PDL-EPL-350RGB	1M	3M	6M
3200K	6330Lux	960Lux	360Lux
5600K	6700Lux	880Lux	300Lux

详情参数 | Product Introduction

型号 MODEL	市电输入 MAINS INPUT	色温 COLOR TEMPERATURE	调光范围 DIMMING	工作环境温度 WORK TEMPERATURE	颜色 COLOR	地址码 ADDRESS CODE	频道 CHANNEL	标准配置 STANDARD CONFIGURATION	可选配件 OPTIONAL ACCESSORIES
PDL-EPL-350RGB	100 ~ 240V 功率:350W	1600-20000K	0-100%	-10 ~ 50℃	HSI360可调 全色域	512*8	DMX512协议 (2.4G外置天线)	平板灯X1 5米电源线X1	蛋格罩X1 信号线X1 512控制器X1
电池输入 BATTERY INPUT	电池续航时间 BATTERY LIFE	风扇 FAN	尺寸 SIZE	重量 WEIGHT	8种控制模式 8 CONTROL MODES		显色性 COLOR RENDERING		
14.8V/10AH *2 功率:210W 兼容D-TAP 插头直流供电	满功率使用约 90分钟, 电池 容量越大续航 时间越长	灯头温度达到 50℃ 时风扇 启动,温度越高, 转速越快	527*163*58mm (裸灯)	9.7kg (裸灯)	色温模式/色调模式/色坐标模式/ 特别色温模式/四基色模式/预置色模式 /效果模式/色卡模式		TLI ≥ 95 CRI ≥ 95		

PDL-GF-900D

充气灯 >>

自动充气，智能调速风扇，精准控光，满足拍摄需求，适用于吊装在摄影场所上方使用。

INFLATABLE LAMP >>

Automatic inflation, intelligent speed regulating fan, accurate light control, meeting the shooting needs, suitable for hoisting above the photography place.



产品特点 | Product Features

- 光效高，光品好，显色指数高达95以上，还原真实色彩
The light efficiency is high, the light quality is good, the color rendering index is as high as 95 or more, and the true color is restored.
- 高效散热，内置风扇，自带温度保护，延长灯珠使用寿命
Efficient heat dissipation, built-in fan, built-in temperature protection, prolonging the service life of lamp beads.
- 色温精准，2600K ~ 6000K任意调节
The color temperature is accurate, 2600K~6000K can be adjusted arbitrarily.
- 具有，控制器无线远程控制，接线远程控制和灯体自带控制三种控制模式
There are three control modes: wireless remote control of the controller, remote control of wiring and control of the lamp body.
- 体积小，重量轻，灯头折叠包装，减小包装体积，便携带
Small size, light weight, the lamp head folds and packs, reduces the packaging volume, and is easy to carry.
- 自动充气，智能调速风扇
Automatic inflating, intelligent speed control fan.
- 应用灯体分离设计，控制器可移动放置低处或挂在三脚架上，轻松方便使用
With the design of the lamp body separation, the controller can be moved and placed low or hung on a tripod, making it easy to use.

产品附件 | Product accessories



GF003 电源盒
Power box



S011 电源盒便携包
Power box carrying case



S012 灯头便携包
Lamp holder carrying case



S013 充气罩便携包
Inflatable cover carrying case



GF005 DC连接线
Dc cable



GF004 充气罩
Inflatable hood



SF002 5m信号线
5m signal line



SF001 3m电源线
3m power cord

灯光参数 | Light Parameters

垂直距离（高度5米） Vertical distance (height 5 m)	中心/centre	1M	2M	3M
光照度(LUX) 3200K	530	480	420	300
光照度(LUX) 5600K	600	530	430	320


详情参数 | Product Introduction

型号 MODEL	市电输入 MAINS INPUT	色温 COLOR TEMPERATURE	调光范围 DIMMING	工作环境温度 WORK TEMPERATURE	防护等级 DEGREE PROTECTION	地址码 ADDRESS CODE	频道 CHANNEL	显色性 COLOR RENDERING
PDL-GF-900D	100 ~ 240V 功率:900W	2600~6000K	0~100%	-10 ~ 50℃	IP20	512*8	DMX512协议 (2.4G外置天线)	TLCI≥95 CRI≥95
充气罩尺寸 INFLATABLE HOOD SIZE		尺寸 SIZE		重量 WEIGHT		标准配置 STANDARD CONFIGURATION		可选配件 OPTIONAL ACCESSORIES
2400mm*750mm*650mm		φ 320mm*1100mm（灯头便携包） 620mm*160mm*330mm（控制盒便携包） 1110mm*480mm*360mm（包装外箱）		4.5kg（控制盒重量） 14kg（灯头重量） 28.4kg（一套标配灯总重，含配件包装）		灯体X1 灯体固定头X1 控制盒X1 充气罩X1 DC10米连接线X1 大功率3米电源线X1		信号线x1

电池手持灯

产品特点 | Product Features

- 极简操作
- 还原色彩
- 无线控制
- 超长续航
- 精准调光
- 强磁固定
- DMX512无线通讯协议

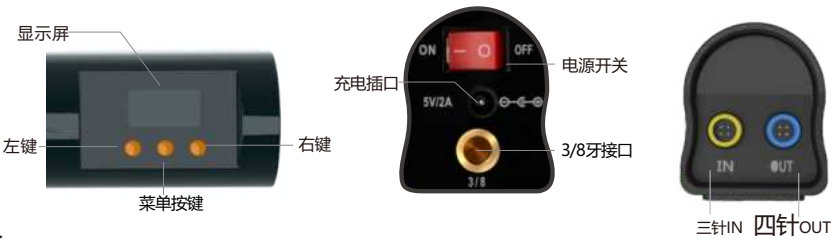


产品参数 | Product Parameter

型号/Model	PDL-RH-10W	PDL-RH-20W	PDL-RH-40W
电池 /Battery	14000mAH	28000mAH	56000mAH
功率 /Power	10W	20W	40W
色温 /Color	RGB/1600K ~ 20000K	RGB/1600K ~ 20000K	RGB/1600K ~ 20000K
频道 /Channel	DMX512无线通讯协议	DMX512无线通讯协议	DMX512无线通讯协议
分控 /Sub Control	256组	256组	256组
光照度 /illuminance	400（1米）	700（1米）	1000（1米）
TLCI 指数	≥96	≥96	≥96
CRI 显示指数	> 96	> 96	> 96
调光范围 /Dimming range	0-100%	0-100%	0-100%
灯珠数量 /LED Quantity	60	126	252
工作温度 /Temperature	-10℃~ 60℃	-10℃~ 60℃	-10℃~ 60℃
产品尺寸 /Product size	45*55*530mm	45*55*810mm	45*55*1300mm
待机时长 /Standby	≥5H	≥5H	≥5H
产品重量 /product weight	0.75KG	1.22KG	2.1KG
控制模式 /control model	DMX512(无线/有线)控制 / 灯上面板控制	DMX512(无线/有线)控制 / 灯上面板控制	DMX512(无线/有线)控制 / 灯上面板控制
适配器 /the adapter	24V-1.5A	24V-2.5A	24V-3.5A
使用寿命 /Service life	5Years	5Years	5Years

交流灯管

产品特点 | Product Features

- 极简操作
- 还原色彩
- 无线控制
- 精准调光
- DMX512无线通讯协议

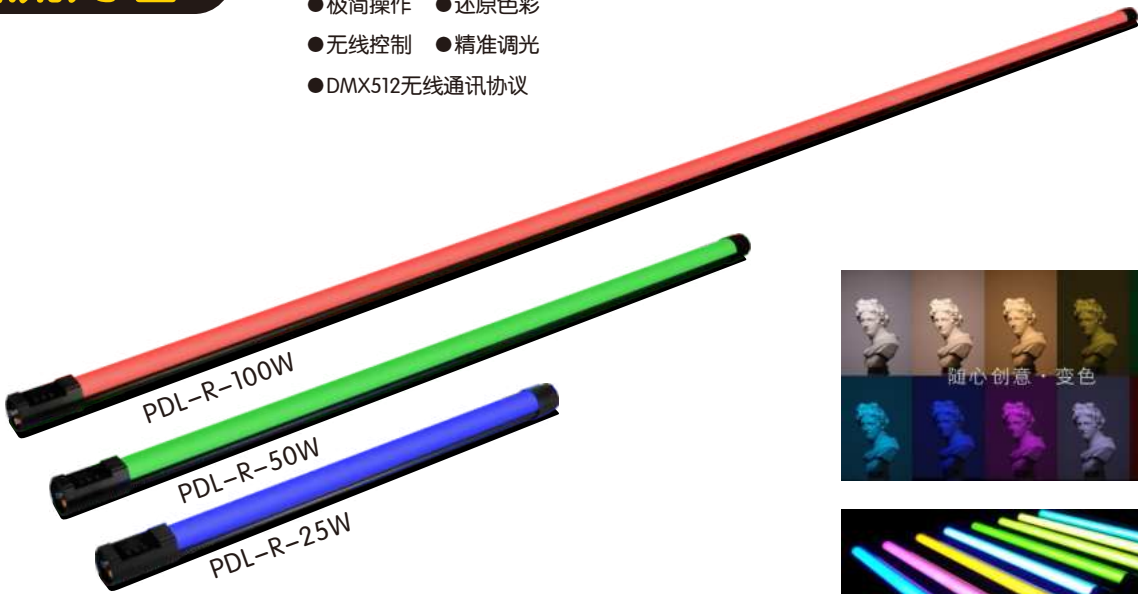


产品参数 | Product Parameter


型号/Model	PDL-R-25W	PDL-R-50W	PDL-R-100W
输入 / Input	AC85-265V DC24-36V-2A	AC85-265V DC24-36V-2A	AC85-265V
功率 /Power	25W	50W	100W
色温 /Color	RGB/1600K ~ 20000K	RGB/1600K ~ 20000K	RGB/1600K ~ 20000K
无线频道 /Radio Channel	DMX512	DMX512	DMX512
分控 /Sub Control	256组	256组	256组
光照度 /illuminance	700（1米）	1050（1米）	1200（1米）
TLCI 指数	≥96	≥96	≥96
CRI 显示指数	> 96	> 96	> 96
调光范围 /Dimming range	0-100%	0-100%	0-100%
灯珠数量 /LED Quantity	140	280	560
工作温度 /Temperature	-10℃~ 60℃	-10℃~ 60℃	-10℃~ 60℃
产品尺寸 /Product size	686mm*44mm	1262mm*44mm	2413mm*44mm
待机时长 /Standby	≥5H	≥5H	≥5H
产品重量 /product weight	0.61KG	1.13KG	2.14KG
控制模式 /control model	DMX512(无线/有线)控制 / 灯上面板控制	DMX512(无线/有线)控制 / 灯上面板控制	DMX512(无线/有线)控制 / 灯上面板控制
使用寿命 /Service life	5Years	5Years	5Years



单灯夹
交流管-LF015
电池管-LF001

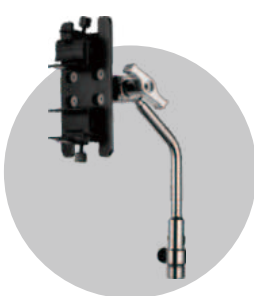

双灯夹
交流管-LF016
电池管-LF002

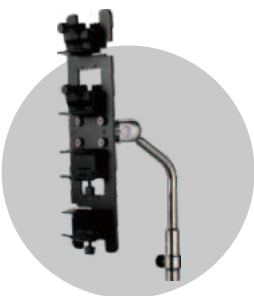

四灯夹
交流管-LF017
电池管-LF003



5m灯管主控线
LF011



适配器
24V/2A-LF007 24V/1.5A-LF022
24V/2.5A-LF023 24V/3.5A-LF004



27年行业积累与创新 深得影视工作者青睐

本公司生产大型电影拍摄及微电影、短视频、直播自媒体等专业摄影器材（灯架、灯具、产品附件）。现有先进成熟的生产流水线和品牌生态产业链。轻便型灯架，实用型灯架，影视型灯架，在摄影器材行业几十年技术积累与创新，过硬的产品制造技术优势。

2019年，针对市场调研，需求链接研发，制造出符合市场需求的产物，从而达到新时代工业的精品。如今研产出太空摄影灯系列，聚光灯系列，平板灯系列，电池手持灯（双色温/RGB）系列，交流灯管（双色温/RGB）系列，在摄影灯领域打开新格局，赢得业界人士对新产品的肯定，我们拥有强大的技术储备力量，力求创新，坚定信念，打造东莞三星摄影器材公司成为行业最有竞争力品牌。

The company produces large-scale film shooting and micro film, short video, live we media and other professional photography equipment (lamp rack, lamps, product accessories). The existing advanced and mature production line and brand ecological industry chain. Portable light frame, practical light frame, film and television light frame, in the photographic equipment industry for decades of technology accumulation and innovation, excellent product manufacturing technology advantages.

In 2019, according to the market research, demand link research and development will be carried out to produce products that meet the market demand, so as to achieve the high-quality products of the industry in the new era. Now, we have developed space camera lamp series, battery handheld lamp (dual color temperature / RGB) series, and AC light tube (dual color temperature / RGB) series. We have opened a new pattern in the field of photography lamp and won the affirmation of the industry for new products. We have a strong technical reserve force, strive to innovate, firm our faith, and make Dongguan Samsung photography equipment company become the most competitive brand in the industry.

