

DATA SPECIFICATION特性要求: (Table-1)


ITEM 项目	MEASURMENTS 测试脚位	CHARACTERISTICS 测试范围	MEASURING CONDITIONS 测试条件 (T=23±4℃;HR(%)=45±15)	REMARK 备注			
LS 電 感	PIN(2-1)	370uH±10%	F(kHz)=132, Ug(V)=1	SERIAL MODE 串联模式			
DCR 直流	PIN(2-1)	165mΩ MAX.	/	4 WIRE MODE 四线模式			
	PIN(4-3)	150mΩ MAX.	/	4 WIRE MODE 四线模式			
	PIN(6-7)	35mΩ MAX.	/	4 WIRE MODE 四线模式			
HIPOT 耐压	PRI./SEC.	NO BREAKDOWN 漏 电 流≤1.0mA	VAC=1200V/3SEC. F(Hz)=60	/			
PH 相位	REFER TO LAYOUT DIAGRAM F聉G-1 参照原理图 FIG-1						


Prepared By ENG:	Date:	TITLE:	CUSTOMER	MODEL NO.:EE22	
Checked By QA:	Date:		Approved:	REV.	00
Approved By ENG:	Date:	TRANSFORMER	Date:	PAGE	1 OF 3




OUTLINE DIAGRAM (外观图)

UNIT: mm

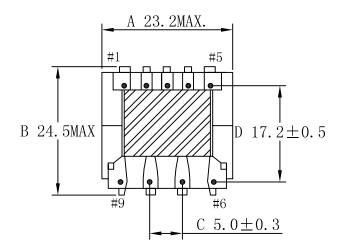

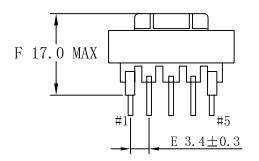


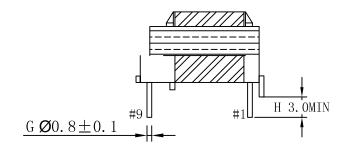

NOTES:

- 1. The product must be impregnated varnish . 产品须含浸凡立水.
- 2. The core are to be held with 2 layers 6.0mm width tape; 在铁芯上包2 圈6.0mm宽的胶纸;
- 3. YYWW: year and week code(FIG-4).
 YYWW:年份周期代码(FIG-4).
- 4. The part should be comliped with RoHS requirement. 产品需符合ROHS要求.

Prepared By ENG: Date :		TITLE :	CUSTOMER	MODEL NO.: EE22	
Checked By QA:	Date :		Approved:	REV.:	00
Approved By ENG:	Date :	TRANSFORMER	Date:	PAGE	2 OF 3

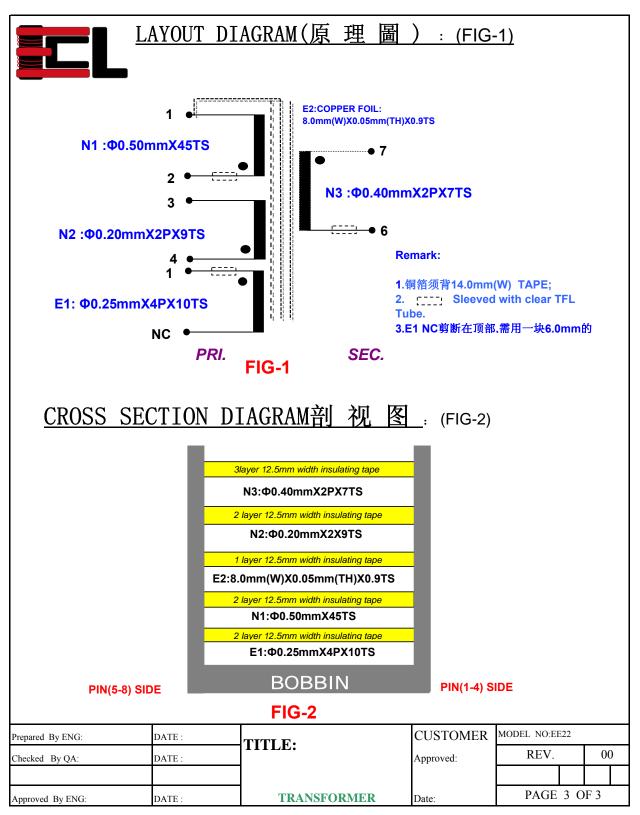

免责条款 Disclaimer

Specifications and appearances may change without notice. All statements, technical information and recommendations herein are based on tests that we believed to be reliable, but the accuracy and completeness are not guaranteed. Before using, user should determine the suitability of the product for its intended use, and the user assumes all risks and liabilities whatsoever in connection therewith. Neither the seller nor the manufacturer shall be liable for any loss or damage, direct, incidental or consequential, including loss of profits or revenues arising from the use or inability to use the product. Any statements or recommendations shall have no effect unless contained in an agreement signed by authorized personnel of the seller and manufacturer.

依美电感保留更改产品资料和外观的最终权利而无需事先通知。如有任何争议,依美电感保留最终决定权。此中文免责条款为英文版本译本,如中、英文两个版本有任何抵触或不相符之处,应以英文版本为准。